



AUER PANEL MOUNTED BUZZER

814500313
Panel mount buzzer, Ø65mm, Black, 230 V ac, ESG

- Panel mounted buzzer with loud sound level
- Adjustable volume
- 3 selectable sound signals
- For mounting in drilled holes 22.5 mm or 30.5 mm



PRODUCT DESCRIPTION

Panel mounted buzzer with wide voltage range and high enclosure class, IP65. Excellent when you want to call for extra attention in a panel.

TECHNICAL DATA


Diameter	65 mm
Housing Colour	Black
IP class	IP65
Nominal current max	0,044 A
Nominal current min	0,044 A
Number of optional modules	0
Number of tones	3
Power consumption max	0,044 A
Sound level max	105 dB
Sound level min	85 dB
Supply voltage ac max	260 V AC
Supply voltage ac min	150 V AC
Temperature operational max	60 °C
Temperature operational min	-25 °C

Terminal connection	2,5 mm ²
Tone frequency max	3300 Hz
Tone frequency min	50 Hz
Weight	65 g

Tone table

Tone on terminal			
La	N	Lb	
X	X		pulling tone
X	X	X	variable tone
X	X	X	continuous tone

ESG

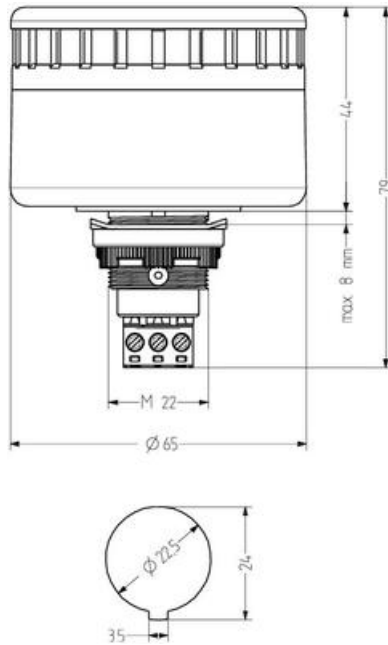

The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.

Distance (m)	Sound pressure dB (A)															
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80
50	31	36	41	46	51	56	58	60	62	64	66	68	70	72	74	76
100	27	32	37	42	47	52	54	56	58	60	62	64	66	68	70	72
200	23	28	33	38	43	48	50	52	54	56	58	60	62	64	66	68
500	17	22	27	32	37	42	44	46	48	50	52	54	56	58	60	62

The sound pressure decreases by 6 dB when doubling the distance



Justerbar volym
med hjälp av
potentiometer,
(ej ESK.)

