

POWER SUPPLY 1-PHASE, 36 V DC DIMENSION C SERIES

CPS20.361

PSU 100-240V ac I/P 36V dc 13.3A 480W O/P

- Output current of 13.3 A
- Up to 94.2% accuracy
- Active PFC
- High short-circuit currents
- Hiccup Plus



PRODUCT DESCRIPTION

Puls Dimension C-series stands for cost optimization without compromising quality, reliability or performance. CPS20.361 high efficiency over a wide load range, which results in reduced power consumption and longer life regardless of load current. An average efficiency is 93.2% with a peak value of 94.3%. In addition, power losses very low at idle, only 2.8 W at 230 V ac.

Short-circuit currents. CPS20 can leave short-circuit currents which is 4 times the nominal current for 15 ms, which helps secondary fuses and achieve selectivity.

Hiccup^{Plus}.

With new pulse short circuit protection you get optimum protection. The unit leaves a very high short circuit that solves fuses and provides sufficient starting current for example DC motors. If the output voltage drops below 20 V dc will be left 2x rated current for 2 seconds, then close the unit by the end to make a new restart attempts after about 18 seconds. This feature ensures a high short-circuit/overload current while avoiding a constant high current that can lead to heat and component damage.

Technical advantages. CPS20 has active power factor correction (PFC) and active power inrush protection that effectively reduces start currents which are ideal if several units are connected in the same phase or if the supply is current limited through example. AC UPS. The protection is always active, regardless of the temperature. DC-OK output, wide temperature range, a large number of approvals and transient filter which ensures operation in interference prone electrical environment makes the unit suitable for virtually all installations.

For good ventilation, we recommend a clearance of 40 mm over 20 mm below and 5 mm on the sides. (15 mm on the sides of adjacent product is a heat source, such as another power supply.)

| | | | | |
|----------------------|----------------------|---------------------|---------------------|---------------------|
| Stripping sec. fuses | | | | |
| | 0.75 mm ² | 1.0 mm ² | 1.5 mm ² | 2.5 mm ² |
| C-2A | 51 m | 69 m | 100 m | 153 m |
| C-3A | 43 m | 57 m | 83 m | 128 m |
| C-4A | 32 m | 44 m | 64 m | 99 m |
| C-6A | 8 m | 13 m | 19 m | 31 m |
| C-8A | 3 m | 5 m | 7 m | 10 m |
| C-10A | 2 m | 4 m | 6 m | 8 m |
| C-13A | - | 1 m | 2 m | 5 m |
| B-6A | 29 m | 39 m | 54 m | 79 m |
| B-10A | 8 m | 11 m | 19 m | 24 m |
| B-13A | 7 m | 9 m | 14 m | 23 m |
| B-16A | 1 m | 1 m | 2 m | 4 m |

TECHNICAL DATA

INPUT DATA

| | |
|--|------------|
| Input voltage ac | 100-240 V |
| Input voltage ac min | 100 V AC |
| Input voltage ac max | 264 V AC |
| Inrush current at 120 V ac typical | 9 A |
| Inrush current at 230 V ac typical | 7 A |
| Input voltage range | Wide-range |
| Power factor at 120 V ac, full load. Typical | 0,99 |
| Power factor at 230 V ac, full load. Typical | 0,95 |
| Number of phases | 1 |

OUTPUT DATA

| | |
|--------------------|---------|
| Output voltage | 36 V DC |
| Output voltage min | 36 V DC |
| Output voltage max | 42 V DC |
| Output current | 13,3 A |
| Power | 480 W |

EFFICIENCY / LIFETIME / MTBF

| | |
|---|----------|
| Efficiency at 120 V ac, full load, typical | 93 % |
| Efficiency at 230 V ac, typical | 93,2 % |
| Efficiency at 230 V ac, full load, typical | 94,3 % |
| Lifetime at 120 V ac, full load and +40 ° C | 85000 h |
| Lifetime at 230 V ac, full load and +40 ° C | 101000 h |
| MTBF (IEC 61709) 230 V ac, max load, 40 ° C | 537000 h |

DIMENSIONS

| | |
|--------|--------|
| Width | 65 mm |
| Height | 124 mm |
| Depth | 127 mm |
| Weight | 1 kg |

OTHER

| | |
|--|--|
| Approvals | ABS, ATEX, CB, CE, CSA US, cRUus, cULus, GL, IECEx |
| Hold time at 120 V ac, typical full load | 26 ms |
| Hold time at 230 V ac, typical full load | 26 ms |
| IP class | IP20 |
| Clamp type | Screw on |
| Material protection | Aluminium |
| Supply frequency | 50-60 ±6 % |
| Ripple max | 100 mV pp |
| Series | Dimension C |
| Power consumption 120 V ac | 4,36 A |
| Power consumption 230 V ac | 2,33 A |
| Power drop from +60 °C to + 70 °C | 12 W/°C |
| Temperature min without derating | -25 °C |
| Temperature max without derating | 60 °C |
| Type Power Supply | AC-DC |
| DC relay output | Yes |
| Active Transient | Yes |

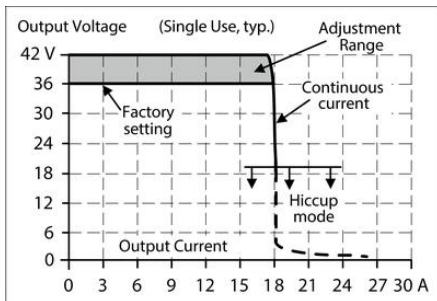


Fig. 15-1 Output current vs. ambient temp.

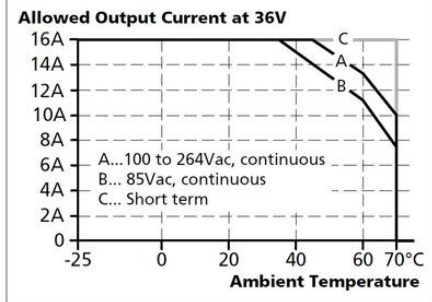


Fig. 9-2 Losses vs. output current at 36V, typ.




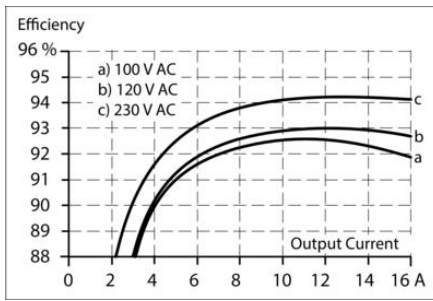


Fig. 6-3 Short-circuit on output, Hiccup^{PLUS} mode, typ.

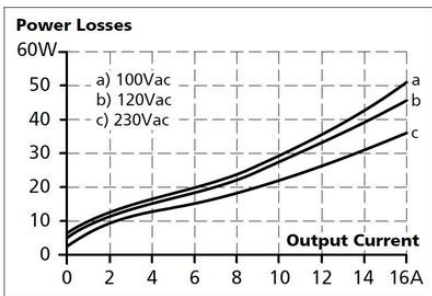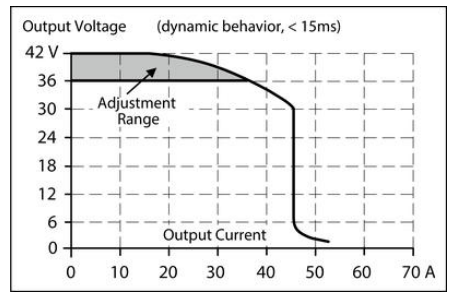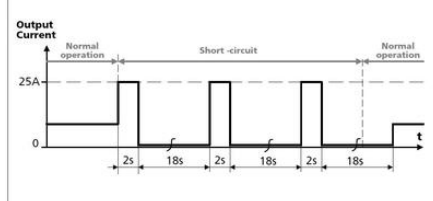


Maximal wire length¹⁾ for a fast (magnetic) tripping:

| | 0.75mm ² | 1.0mm ² | 1.5mm ² | 2.5mm ² |
|-------|---------------------|--------------------|--------------------|--------------------|
| C-2A | 51m | 69m | 100m | 153m |
| C-3A | 43m | 57m | 83m | 128m |
| C-4A | 32m | 44m | 64m | 99m |
| C-6A | 8m | 13m | 19m | 31m |
| C-8A | 3m | 5m | 7m | 10m |
| C-10A | 2m | 4m | 6m | 8m |
| C-13A | - | 1m | 2m | 5m |
| B-6A | 29m | 39m | 54m | 79m |
| B-10A | 8m | 11m | 19m | 24m |
| B-13A | 7m | 9m | 14m | 23m |
| B-16A | 1m | 1m | 2m | 4m |

Fig. 13-1 Front side



Fig. 20-1 Front view

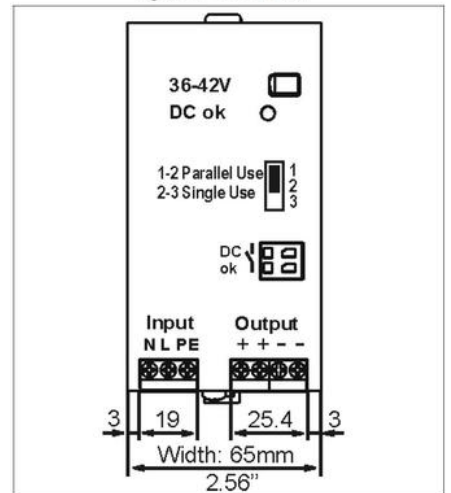

Side view

