



CROUZET SWITCHES - SERIES 83 731/83 732/83 733

83733310
837333 C/O 2.00M




- Adjustable fixing via counternut
- IP66



PRODUCT DESCRIPTION

TECHNICAL DATA

Actuation force min	6 N
Cable length	2000 mm
Contact type	Changeover (SPDT)
Conventional thermal current	12 A
Hysteresis max	1,5 mm
IP class	IP56
Operating power total min	25 N
Rated current at 250 V ac	5 A
Temperature operational max	70 °C
Temperature operational min	-5 °C
Voltage max	250 V

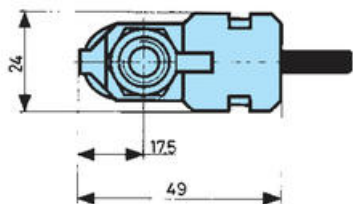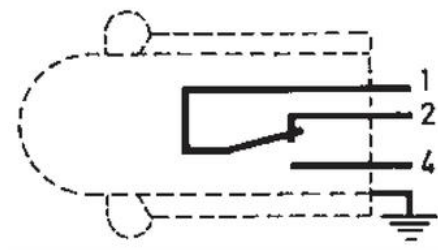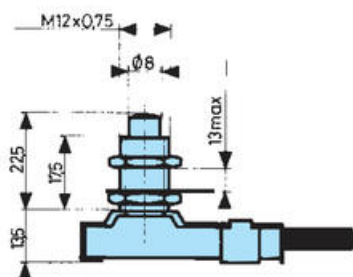

- 1 Svart (gemensam)
- 2 Brun (NC)
- 4 Blå (NO)