



ASCO - 2/2 PULSE VALVE 3/4"-1 1/2"

SCE353A811

Solenoid pulse valve 2/2 NC 3/4" 230/50

- Currentless closed
- Thread or quick coupling
- Electric/Air controlled
- Housing in aluminium




PRODUCT DESCRIPTION

TECHNICAL DATA

Connection	3/4 BSP
Differential air pressure max	8,5 bar
Differential pressure max	8,5 bar
Differential pressure min	0,3 bar
Flow factor / flow coefficient	14
Flow max	233 l/min
Function 1	2/2
Function 2	Normally Closed (SPST)
IP class	IP65
Material body	Aluminium
Material coil	Epoxy
Material flask	POM
Material of seals	NBR
Material plunger	Stainless steel
Material plunger tube	Stainless steel
Material short-circuit ring	Copper

Material spring	Stainless steel
Power consumption	6,3 W
Pressure max	10 bar
Temperature of media from	-20 °C
Temperature of media to	85 °C
Temperature operational max	85 °C
Temperature operational min	-20 °C
Throughput	20 mm
Weight	0,52 kg
Voltage AC	230 V

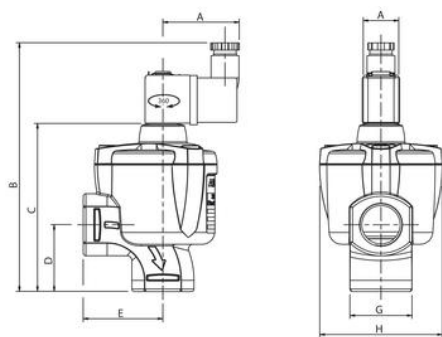

Ventil	A	B	C	D	E	F	G	H
SCE353A811	48	156	106	42	50	22	39	77
SCE353A821	48	162	112	51	62	22	46	77
SCE353A831	48	191	141	60	71	22	62	112