



ASCO - 3/2 SEAT VALVE AIR CONTROLLED 1/2"-2"

E398A001

Angle seat valve 1/2" 3/2 Universal



- Universal
- Working pressure 0 to 40 bar
- For temperatures up to +250 °C
- For viscosity up to 5,000 cSt





PRODUCT DESCRIPTION

TECHNICAL DATA

Approvals	SIL2
Connection	1/2 BSP
Connection air	1/8 BSP
Differential air pressure max	40 bar
Differential oil pressure max	40 bar
Differential pressure max	40 bar
Differential pressure min	0 bar
Differential steam pressure max	40 bar
Differential water pressure max	40 bar
Function 1	3/2
Function 2	Universal
Material body	Stainless steel 316L
Material box stuffing	PTFE flask filled
Material controls	Nickel plated aluminum
Material of seals	Graphite
Material packing	Stainless steel

Material piston rod	Stainless steel
Material piston seal	Bronze, PTFE
Pilot pressure max	10 bar
Pressure max	40 bar
Temperature of media from	-10 °C
Temperature of media to	250 °C
Temperature operational max	180 °C
Temperature operational min	-25 °C
Throughput	15 mm
Type of valve	Seat valve
Weight	1,88 kg
Viscosity max	5000 cSt

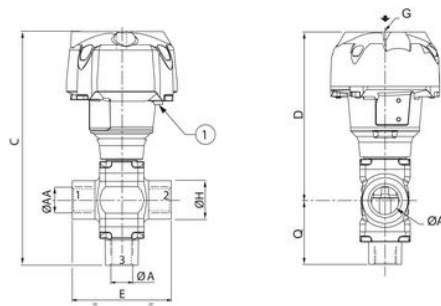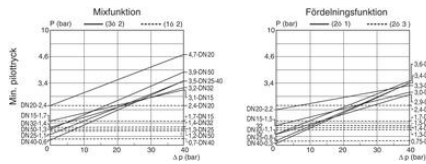

Ventil (ØAA)	ØA	ØB	C	D	E	G	ØH	ØP	Q
1/2"	15	110	203,1	151,6	85	1/8	33	95	51,5
3/4"	20	132,5	229,2	170,9	110	1/8	40	117	58,3
1"	25	132,5	244,9	180,9	120	1/8	46	117	64
1 1/4"	32	191	318,2	237,2	145	1/4	57	172,5	81
1 1/2"	40	191	361,7	259,2	150	1/4	65	172,5	102,5
2"	50	247	436	328,5	190	1/4	75	230	107,5