


SOCKETS FOR C9 MINIATURE RELAYS

4-pole

S9M

Socket For C9 Relay 14 Pin Screw

- DIN-rail or bottom mount
- Semi-protected
- Small construction dimensions, only 22.5 mm wide
- Supplied with open connections
- Retaining bow included

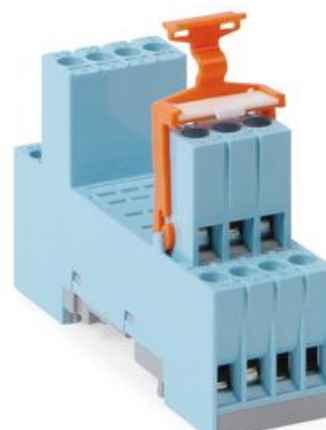

PRODUCT DESCRIPTION

TECHNICAL DATA

OUTPUT DATA

Breaking Voltage	250 V
Breaking capacity current	6 A

GENERAL DATA

Isolation connection/connection	2500 V
Isolation connection/rail	2500 V
Material	Lexan
Torque connection	0,7 Nm
Mounting	DIN-rail
Screw size	M3, Pozi
Connection area single wire	4 mm ² / 2x2,25 mm ²
Connection area multiple conductors	0,35-2,5 mm ²
Temperature operational min	-40 °C
Storage temperature min	-40 °C
Storage temperature max	80 °C
Temperature operational max	60 °C
Weight	54 g

