


## DISCONNECT TERMINALS - TRK, STK/K

TK, STK/K, STKD/K

1381.2

STK 2/K Beige, 4mm<sup>2</sup> Compact disconnect terminal, multi-foot

- Material polyamide 6.6
- Temperature resistance -40 °C...+105 °C
- Flammability class V2
- Removable plug option
- Fuse solid links

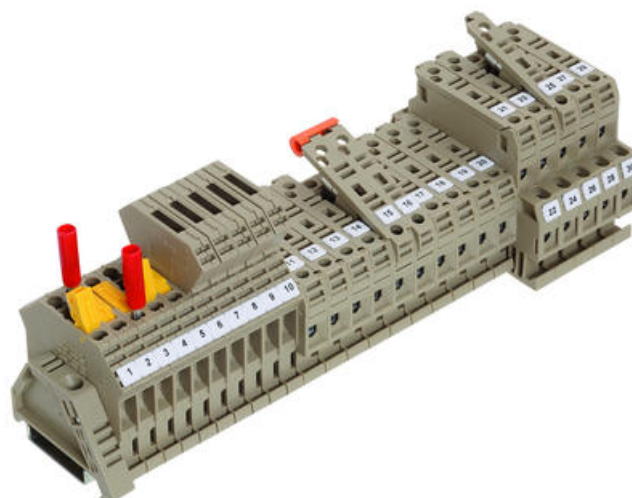

### PRODUCT DESCRIPTION

Disconnect terminals are commonly used within measurement and control systems. They are ideal for when troubleshooting electrical circuits, when commissioning new systems or refurbishing existing installations.

This series come with a combi-foot for installation on TS 32/TS 35 rails or with a snap-on foot for the TS 15 DIN rail.

The TRK 1.5 is available as a 'blade type' disconnect or with a removable disconnect plug that can be removed and retained by the user to prevent accidental activation.

#### Features of the TRK 1.5/TRK 1.5 DS

- Same construction as the standard terminal blocks
- A sturdy, closed insulation housing
- The established disconnect-blade with high-quality surfaces
- Minimal and stable level of contact resistance
- Touch-safe protection also during the disconnect

#### There are 4 -types of DS plugs

- Disconnect without circuitry
- Disconnect plug with wire jumper
- Disconnect plug with blocking diode
- Disconnect plug with pass through diode

STB Versions offers the advantage of a 4mm test socket for pick-off.

TK & STK/K versions are low profile and come with a hinged lever for disconnecting and a contact sleeve.

#### Features of the TK and STK../K

Same construction as the standard terminal fuse blocks

- Hinged lever latches into fully open position.
- Disconnect terminals can be used as fuse-disconnect terminals by changing the sleeve (KH5 and KH6.3) to a fuse
- STKD1/K includes a feed through connection

## TECHNICAL DATA

## GENERAL DATA

Rated wire cross section	4 mm <sup>2</sup>
Colour	Beige
Rated voltage IEC	500 V
Rated current IEC	6,3 A
Mounting	TS 35
Rated impulse voltage	6 kV
Overvoltage category	III
Contamination degree	3
Approvals	CSA, CSA US
Additional information	with contact sleeve

## DIMENSIONS

Length	49 mm
Width	8 mm
Height TS 35/7.5	39 mm
Height TS 32	73,3 mm

## CONNECTION DATA

Connections	2
Number of levels	1
Plug gauge acc. EN 60 947-1	A4
Cross section single wire from	0,2 mm <sup>2</sup>
Cross section single wire to	4 mm <sup>2</sup>
Cross section stranded wire from	0,2 mm <sup>2</sup>
Cross section stranded wire to	4 mm <sup>2</sup>
Cross section stranded with ferrule from	0,2 mm <sup>2</sup>
Cross section stranded with ferrule to	2,5 mm <sup>2</sup>
Rated wire cross section from (AWG)	22
Rated wire cross section to (AWG)	12
Stripping length	9 mm
Screw size	M 3
Screw type	Slotted
Torque min	0,5 Nm
Torque max	1 Nm

MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V2
Operating temperature from	-40 °C
Operating temperature to	105 °C

APPROVALS

Rated voltage CSA	500 V
Rated current CSA	6,3 A
CSA test standard	C22.2 No 158
Rated voltage CSAus	500 V
Rated current CSAus	6,3 A
CSAus test standard	UL 1059

ADDITIONAL DATA

Tariff code	85369010
Country of origin	DE
Weight	13,18 g
Pack size	100
Type of terminal	Screw Terminals, DIN Rail terminals

