


EARTH TERMINALS - FSL 1.5-16MM²

FSL

3203.2

FSL 1,5/2A GNYE

- Wiring without tools
- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

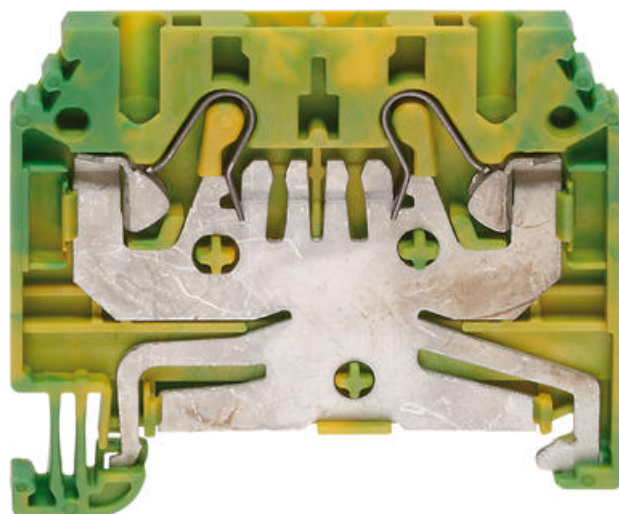

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Rated wire cross section	1,5 mm ²
Colour	Green/yellow
Mounting	TS 35
Overvoltage category	III
Contamination degree	3
Approvals	CSA, CSA US, KEMA KUR, EAC

DIMENSIONS

Length	48,5 mm
Width	4,1 mm
Height TS 35/7.5	43 mm

CONNECTION DATA

Connections	2
Number of levels	1
Plug gauge acc. EN 60 947-1	A1
Cross connect channels	2
Cross section single wire from	0,2 mm ²

Cross section single wire to	1,5 mm ²
Cross section stranded wire from	0,2 mm ²
Cross section stranded wire to	1,5 mm ²
Cross section stranded with ferrule from	0,2 mm ²
Cross section stranded with ferrule to	1,5 mm ²
Rated wire cross section from (AWG)	24
Rated wire cross section to (AWG)	16
Stripping length	12 mm

MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

APPROVALS

CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
EAC test standard	TR ZU 004/2011
KEMA KEUR test standard	EN 60947-7-2:2009

ADDITIONAL DATA

Tariff code	85369010
Country of origin	BG
Weight	8,1 g
Pack size	100

