


FUSE TERMINALS - FTRK/FSIK

FTRK, FSIK

3239.4

FSIK 4/2A/MT BK

- For glass tube fuses 5x20
- For automotive fuses
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C

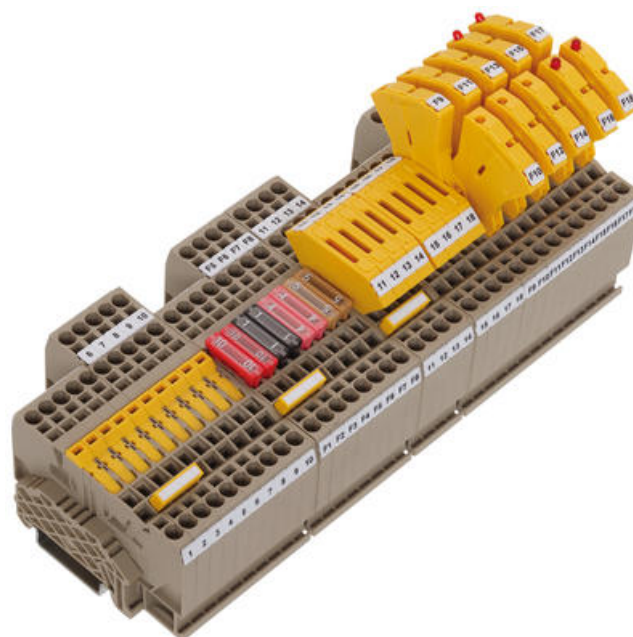

Width	6,1 mm
Height TS 35/7.5	47 mm
Height	46 mm

CONNECTION DATA

Connections	2
Number of levels	1
Plug gauge acc. EN 60 947-1	A3
Cross connect channels	1
Cross section single wire from	0,2 mm ²
Cross section single wire to	4 mm ²
Cross section stranded wire from	0,2 mm ²
Cross section stranded wire to	2,5 mm ²
Cross section stranded with ferrule from	0,2 mm ²
Cross section stranded with ferrule to	2,5 mm ²
Rated wire cross section from (AWG)	24
Rated wire cross section to (AWG)	10
Stripping length	12 mm

MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

APPROVALS

Rated voltage UL	300
Rated voltage UL	300 V
Rated current UL	15 A
UL test standard	UL 1059
Rated voltage CSA	300 V
Rated current CSA	15 A
CSA test standard	C22.2 No 158
Rated voltage CSAus	300 V
Rated current CSAus	15 A
CSAus test standard	UL 1059

KEMA KEUR test standard	EN 60947-7-3:2009
--------------------------------	-------------------

ADDITIONAL DATA

Tariff code	85369010
Country of origin	BG
Weight	13,72 g
Pack size	50