
## EXTERNAL LINK CROSS CONNECTORS

**AQI External Links** 

2032.0 AQI 2/5/11 - 2 pole External Cross connector for SRK2.5/RKD2.5/IK2.5/IKD2.5/BKA2.5

Insulated for protection

Reliable & secure fixing

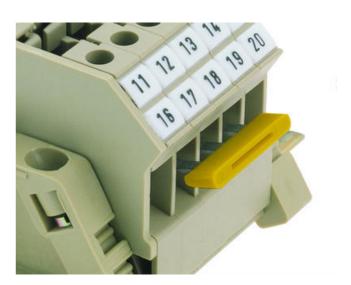

*CONTACLIP* 

## PRODUCT DESCRIPTION

External cross connection links makes it possible to connect potentials of terminals where there is no option of a central cross connection channel.

These links are quicker, easier and a more reliable way of linking than using wire links with ferrules.

When using the external, the rated cross section of wire is reduced to the next smallest size.

## **TECHNICAL DATA**

## **GENERAL DATA**

Colour	Yellow
Rated current IEC	27 A
Mounting	Push in
Contamination degree	3
Additional information	für SRK 2,5(1.Gen.) RKD 2,5 IK 2,5 IKD 2,5 BKA 2,5
DIMENSIONS	
Width	9,26 mm
Pitch	5 mm
CONNECTION DATA	
Number of poles	2
MATERIALS	
Material	Copper
Insulation material	Polyamide 6.6

Flammability class	UL94-V2
Operating temperature from	-40 °C
Operating temperature to	105 °C
ADDITIONAL DATA	
Tariff code	85369010
Country of origin	DE
Weight	0,56 g
Pack size	50