


## TKS TRANSFORMER TERMINALS

### TKS

17031.6  
TKS 4SI 6.3x32 Grey, 4mm<sup>2</sup>, Fuse holder, 6.3 x 32mm  
cartridge type

- Compact 4, 10 and 16mm connections
- Screw and Faston Versions (2.8/6.3mm)
- Touch safe VBG 4 compliant
- Polyamide 6.6 UL 94-V0

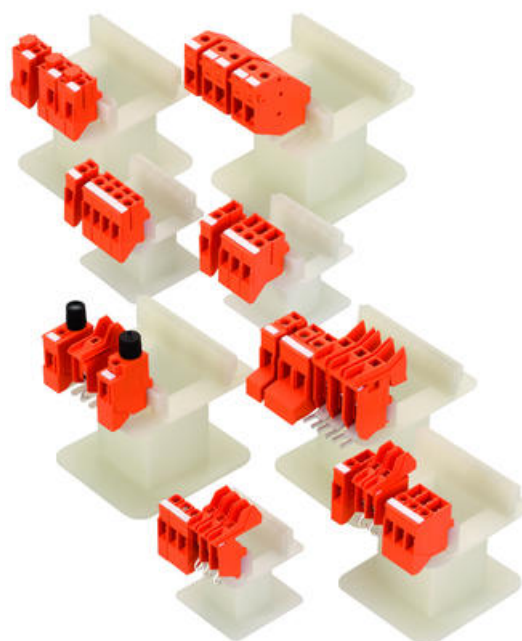

### PRODUCT DESCRIPTION

The TKS range is unique, as the cover can be clipped back to the top of the terminal, so helps prevent accidental melting of the cover when soldering the wire to the hook.

All transformer terminals feature the proven clamping yoke system which guarantees a vibration-resistant connection. Touch safety in compliance with VBG 4 is ensured because of the closed housing design (polyamide PA 6.6 UL 94-V0).

The range includes 1, 2 & 3 pole variants that are a single mould, so are more rigid when fitted to the bobbin.

The TKS4 are suitable for cables up to 4mm<sup>2</sup> cables, TKS10 for 10mm<sup>2</sup> and the TKS16 for 16mm<sup>2</sup>. The standard colours are orange and grey, but other colours are available on request.

There is also a range of matching 4mm fuse terminals that can be selected depending on fuse type and size required.

The PMC SB 7,5 quick marking system is used for labelling the transformer terminals. A large range of pre-marked makers are held in stock.

The previous TK range is still available and can be clipped together using the dove tail moulding, allowing a custom number of poles in one strip.

## TECHNICAL DATA

### GENERAL DATA

Rated wire cross section	4 mm <sup>2</sup>
Colour	Grey
Rated voltage IEC	500 V
Rated current IEC	32 A
Fuse size	6.3 x 32 mm

Mounting	Transformer bobbins
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3
Approvals	UL, CSA, CSA US, KEMA KUR, EAC

## DIMENSIONS

Length	28,3 mm
Width	12,5 mm
Height	43,9 mm

## CONNECTION DATA

Connections	1
Plug gauge acc. EN 60 947-1	A4
Cross section single wire from	0,2 mm <sup>2</sup>
Cross section single wire to	6 mm <sup>2</sup>
Cross section stranded wire from	0,2 mm <sup>2</sup>
Cross section stranded wire to	6 mm <sup>2</sup>
Cross section stranded with ferrule from	0,2 mm <sup>2</sup>
Cross section stranded with ferrule to	4 mm <sup>2</sup>
Rated wire cross section from (AWG)	22
Rated wire cross section to (AWG)	10
Stripping length	8 mm
Screw size	M 3
Screw type	Slotted
Torque min	0,5 Nm
Torque max	1 Nm

## MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

## APPROVALS

Rated voltage UL	600 V
Rated current UL	30 A

<b>UL test standard</b>	UL 1059
<b>Rated voltage CSA</b>	600 V
<b>Rated current CSA</b>	10 A
<b>CSA test standard</b>	C22.2 No 158
<b>Rated voltage CSAus</b>	600 V
<b>Rated current CSAus</b>	10 A
<b>CSAus test standard</b>	UL 1059
<b>EAC test standard</b>	TR ZU 004/2011
<b>KEMA KEUR test standard</b>	EN 60947-7-3:2009

**ADDITIONAL DATA**

<b>Tariff code</b>	85369010
<b>Country of origin</b>	DE
<b>Weight</b>	12,2 g
<b>Pack size</b>	50