



SUCO - 0500/0501 ELECTRONIC PRESSURE SWITCH

Factory set



0500200411002
0..2 bar, G1/4, No, PNP, NBR, M12

- Single switch point
- Small & compact
- Ceramic sensor
- Stainless steel housing

PRODUCT DESCRIPTION

The SUCO 0500/0501 performance series electronic pressure switch offers a small compact electronic switch without compromising on quality which comes factory set (unadjustable by the user) with overpressure protection (up to 2x), has a long service life and is also attractively priced especially at high volumes. Using a ceramic sensor in thick film technology for a good operating temperature range and accuracy, there are six standard pressure ranges starting from 0..2 bar all the way up to 0..100 bar and a hysteresis of 1%-98%, available in normally open or normally closed with a PNP transistor output. The wetted parts are made of ceramic, stainless steel and either NBR, EPDM OR FKM ensuring excellent media compatibility, with six standard electrical connection options including Deutsch, DIN and M12 combined with two standard thread type options.

Customer specific solutions are also available on request.


Application examples

- Automotive
- Braking systems
- Medical
- Mobile hydraulics
- Off highway
- Off-shore
- Rail

TECHNICAL DATA

Accuracy	±0.5 % of adjustment range (Full scale) at room temperature
Adjustment range max	2 bar
Adjustment range min	0 bar
Burst pressure	8 bar
Electrical connection	M12
EMC	EMV 2014/30/EU; EN 61000-6-2:2005; EN 61000-6-3:2007
Function	Normally open (SPST)
Hysteresis	1...98% full scale, programmable at factory (maximum tolerance ±1.0% of adjustment range nominal pressure)
IP class	IP67
Long term stability	±0.1 % of adjustment range (full scale) per year
Material membrane	NBR
Material of body	Stainless steel 1.4305
Material of wetted parts	NBR, Stainless steel 1.4305
Mechanical life expectancy	5,000,000 pulsations at rise rates to 1 bar/ms nominal pressure
Output	PNP
Pressure max	4 bar
Pressure rise	≤ 1 bar/ms
Process connection	G1/4
Repeatability	±0.1 % of adjustment range (full scale)
Shock resistance	"500m / s ² ; 11 ms half sine wave; DIN EN 60068-2-27"
Supply voltage dc max	32 V DC
Supply voltage dc min	9,6 V DC
Switching point adjustment range	2...100 % of adjustment range(full scale), set at factory

Switching time	< 4 ms
Temperature ambient from	-30 °C
Temperature ambient to	100 °C
Temperature of media from	-30 °C
Temperature of media to	100 °C
Weight	80 g
Vibration resistance	20g: 4..2000 Hz sine wave, DIN EN 60068-2-6

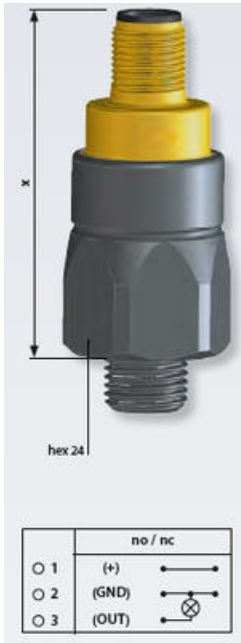

DIN EN 175301-800 A <table> <tr><th>Pin</th><th>Assignment</th></tr> <tr><td>1</td><td>Vcc</td></tr> <tr><td>2</td><td>Gnd</td></tr> <tr><td>3</td><td>Vcc</td></tr> </table> Pin 1: Vcc Pin 2: Gnd Pin 3: Vcc Order number: 011	Pin	Assignment	1	Vcc	2	Gnd	3	Vcc	SI 12 - DIN EN 61076-2-101 A <table> <tr><th>Pin</th><th>Assignment</th></tr> <tr><td>1</td><td>Vcc</td></tr> <tr><td>2</td><td>Vcc</td></tr> <tr><td>3</td><td>Gnd</td></tr> <tr><td>4</td><td>Vcc</td></tr> </table> Pin 1: Vcc Pin 2: Vcc Pin 3: Gnd Pin 4: Vcc Order number: 002	Pin	Assignment	1	Vcc	2	Vcc	3	Gnd	4	Vcc	ISO 15779-A1-4.1 <table> <tr><th>Pin</th><th>Assignment</th></tr> <tr><td>1</td><td>Vcc</td></tr> <tr><td>2</td><td>Vcc</td></tr> <tr><td>3</td><td>Gnd</td></tr> <tr><td>4</td><td>Vcc</td></tr> </table> Pin 1: Vcc Pin 2: Vcc Pin 3: Gnd Pin 4: Vcc Order number: 004	Pin	Assignment	1	Vcc	2	Vcc	3	Gnd	4	Vcc
Pin	Assignment																													
1	Vcc																													
2	Gnd																													
3	Vcc																													
Pin	Assignment																													
1	Vcc																													
2	Vcc																													
3	Gnd																													
4	Vcc																													
Pin	Assignment																													
1	Vcc																													
2	Vcc																													
3	Gnd																													
4	Vcc																													
AMP Superseal 1.5" <table> <tr><th>Pin</th><th>Assignment</th></tr> <tr><td>1</td><td>Vcc</td></tr> <tr><td>2</td><td>Gnd</td></tr> <tr><td>3</td><td>Vcc</td></tr> </table> Pin 1: Vcc Pin 2: Gnd Pin 3: Vcc Order number: 007	Pin	Assignment	1	Vcc	2	Gnd	3	Vcc	Deutsch DT54-3P <table> <tr><th>Pin</th><th>Assignment</th></tr> <tr><td>1</td><td>Vcc</td></tr> <tr><td>2</td><td>Gnd</td></tr> <tr><td>3</td><td>Vcc</td></tr> </table> Pin 1: Vcc Pin 2: Gnd Pin 3: Vcc Order number: 010	Pin	Assignment	1	Vcc	2	Gnd	3	Vcc	Cable connection <table> <tr><th>Pin</th><th>Assignment</th></tr> <tr><td>1</td><td>Vcc</td></tr> <tr><td>2</td><td>Gnd</td></tr> <tr><td>3</td><td>Vcc</td></tr> </table> Pin 1: Vcc Pin 2: Gnd Pin 3: Vcc Order number: 011	Pin	Assignment	1	Vcc	2	Gnd	3	Vcc				
Pin	Assignment																													
1	Vcc																													
2	Gnd																													
3	Vcc																													
Pin	Assignment																													
1	Vcc																													
2	Gnd																													
3	Vcc																													
Pin	Assignment																													
1	Vcc																													
2	Gnd																													
3	Vcc																													
 Thread code: 01	 Thread code: 02																													