



NAFSA - ECM SERIES

ECM13-03/E

- Pull / push design, with optional spring
- Class B winding (130°C)
- Round profile for panel mounting
- Up to 32N force
- Customer specific version available



PRODUCT DESCRIPTION

The ECM series is simple linear solenoid where the stroke movement from start to final position is made by the electromagnetic forces.


Return to start position is done by external forces or of a spring built into the solenoid.

The front end design is ideally suited to panel mounting.

TECHNICAL DATA

Absorbed power @ 20°C, 100% duty	1 W
Absorbed power @ 20°C, 15% duty	6,6 W
Absorbed power @ 20°C, 25% duty	4 W
Absorbed power @ 20°C, 40% duty	2,5 W
Absorbed power @ 20°C, 5% duty	20 W
Beginning of stroke force at 100% duty	0,02 N
Beginning of stroke force at 15% duty	0,2 N
Beginning of stroke force at 25% duty	0,12 N
Beginning of stroke force at 40% duty	0,08 N
Beginning of stroke force at 5% duty	0,5 N
End of stroke force at 100% duty	0,15 N
End of stroke force at 15% duty	1 N
End of stroke force at 25% duty	0,69 N
End of stroke force at 40% duty	0,43 N
End of stroke force at 5% duty	2,29 N

Function	push
Insulation class	B (130°C)
IP class	IP30
Stroke	3 mm
Total weight	25 g
Voltage dc max	205 V
Voltage dc min	6 V
Voltage type	DC

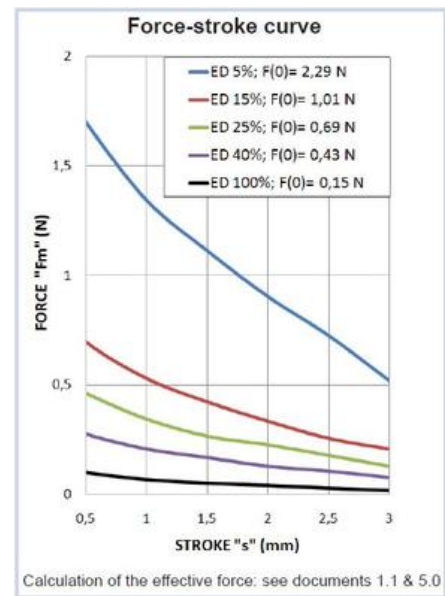

Duty-cycle ED%	Standard voltages										Under demand voltages			
	VDC							VAC			VDC		VAC	
	6	12	24	48	100	125	205	110	230		Min	Max	Min	Max
100%	o	o	o	x	x	x	x	x	x	1.5	24	x	x	x
40%	o	o	o	o	x	x	x	x	x	1.5	48	x	x	x
25%	o	o	o	o	x	x	x	x	x	1.5	48	x	x	x
15%	o	o	o	o	x	x	x	x	x	1.5	48	x	x	x
5%	o	o	o	o	o	x	x	x	x	3	110	x	x	x

Layout: o = Available ; x = Unavailable

