


INSULATED SPADE TERMINALS

FSH

2550.0

FSH 1/6.3, 1.5mm², 6.3 x 0.8mm insulated female spade crimp, Red

- Brass (CuZn), metallic insulation holder Cu-ETP, galv, Sn
- Wide easy entry collar PVC insulation
- Continuous-use temperature range -10°C...75°C
- Male, female and piggy back options

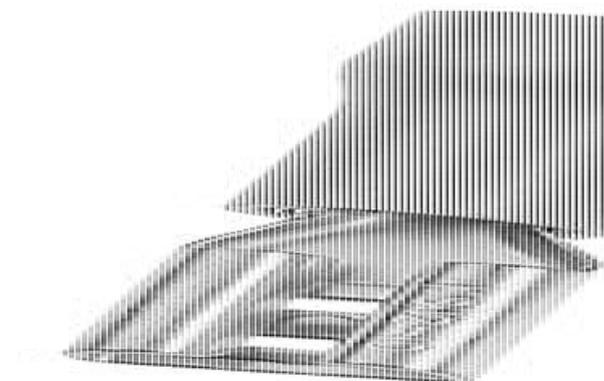

PRODUCT DESCRIPTION

Conta-Clip offer a range of standard automotive type insulated spade crimp terminals to suit many applications.

These terminals are usually identified by the coloured collars for the various cable sizes.

The standard range covers from 0.5mm² to 6mm² cable sizes with 2.8mm to 6.3mm faston connections. These are also available as fully insulated or 'piggy back' variants.

All types within the range have a widened cable entry, making for an easy installation.

TECHNICAL DATA

GENERAL DATA

| | |
|--|-------------------------------------|
| Colour | Red |
| Cross section min | 0,5 mm ² |
| Cross section max | 1,5 mm ² |
| Conductor shape | Flat plug acc. DIN 46245 Teil 1 – 3 |
| Rated wire cross section from (AWG) | 20 |
| Rated wire cross section to (AWG) | 16 |

DIMENSIONS

| | |
|-----------------------------------|--------|
| Length | 21 mm |
| Diameter of feed-in funnel | 3,5 mm |

| | |
|----------|---------|
| DIN size | 6,3 - 1 |
|----------|---------|

MATERIALS

| | |
|----------------------------|--------|
| Conductor material | Copper |
| Contact surface | Tinned |
| Soldered | No |
| Operating temperature from | -10 °C |
| Operating temperature to | 75 °C |

ADDITIONAL DATA

| | |
|---------------------|--------------|
| Tariff code | 85369010 |
| Country of origin | TW |
| Weight | 1,1 g |
| Pack size | 100 |
| Insulation material | Expanded PVC |

