




FLEXAGRAFF®-VA METAL CONDUIT

1080.801.004

FLEXAgraff-VA, stainless steel AD 4 x 6 mm

- Stainless steel
- Flexible
- Stretch resistant
- Compression resistant

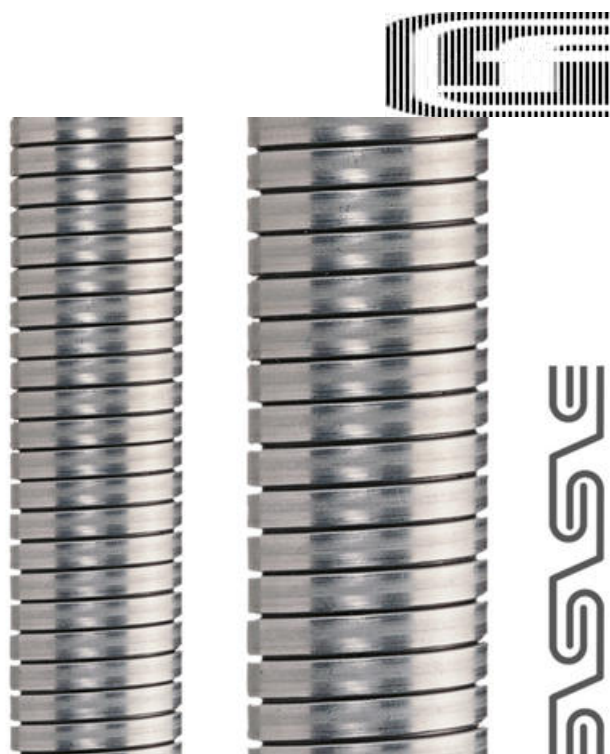

PRODUCT DESCRIPTION

TECHNICAL DATA

Approvals	VDE
Bending radius $\pm 10\%$ dynamic	100
Bending radius -10% static	40
Hose dimension AD	6
Inner dimensions	4 mm
IP class	IP40
Material	Stainless steel
Outer dimensions	6 mm
Pack size	50 m
Temperature operational max	600 °C
Temperature operational min	-200 °C
Weight	0,055 kg/m