


## EARTH TERMINALS - PSL 1.5-10MM

PSL

27001.2

PSL 1.5/2A, 1.5mm<sup>2</sup> Push-in Earth feed through

- Snap on
- 2 to 4 connections
- Pluggable cross connectors
- Push button cable release
- Test pick off point

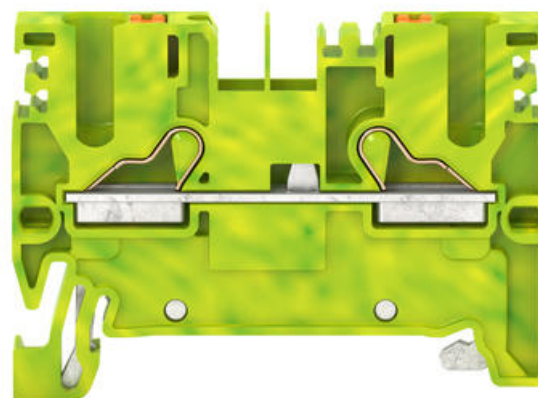

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

Rated wire cross section	1,5 mm <sup>2</sup>
Colour	Green/yellow
Mounting	Mounting rail TS 35/7.5
Rated impulse voltage	6 kV
Overvoltage category	III
Contamination degree	3

#### DIMENSIONS

Length	45 mm
Width	3,5 mm
Height TS 35/7.5	32 mm
Height	30,5 mm

#### CONNECTION DATA

Connections	2
Number of levels	1

Plug gauge acc. EN 60 947-1	A1
Cross connect channels	1
Cross section single wire from	0,14 mm <sup>2</sup>
Cross section single wire to	1,5 mm <sup>2</sup>
Cross section stranded wire from	0,14 mm <sup>2</sup>
Cross section stranded wire to	1,5 mm <sup>2</sup>
Cross section stranded with ferrule from	0,14 mm <sup>2</sup>
Cross section stranded with ferrule to	1 mm <sup>2</sup>
Rated wire cross section from	26 AWG
Rated wire cross section to	14 AWG
Stripping length	10 mm

## MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

## ADDITIONAL DATA

Tariff code	85369010
Country of origin	BG
Weight	5,6 g
Pack size	50
Number of terminals per level	2

