


EMC - ANTI-KINK PROTECTION

Progress® MS EMC FKM

1080.08.52.035

Gland EMC NPB, sleeve, M8, spring sleeve, ø2.5...
3.5mm

- Permanent contact pressure
- 360° contact sleeve construction
- Stainless steel spring
- -40°C...+100°C
- IP68

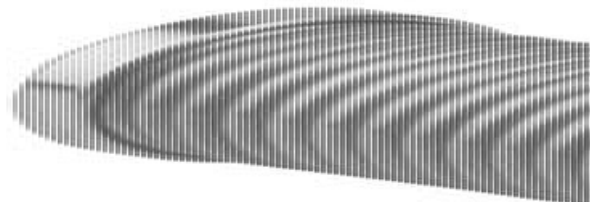

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Thread Size (G)	M8
Insert Type	One-Piece
Cable diameter min	2,5 mm
Cable diameter max	3,5 mm
IP class	IP 68, IP 69 further protection

DIMENSIONS

Thread pitch	1,25
Thread length	5 mm
Height (H)	50 mm
Spanner width (AF)	11 mm

MATERIALS

Material	Nickel-plated brass
Materials O-ring	NBR
Material of seals	TPE

Nozzle material	Stainless steel A2
Temperature range	-40°C ... +100°C

APPROVALS

Approvals	SEV, CE, DNV, EAC, VDE
Strain relief	Version A acc. to EN 62444

ADDITIONAL DATA

Pack size	10
Country of origin	CH
Tariff code	74199949
Weight	16,5 g
Additional features	Metric coarse-pitch thread (with VDE test report)

