


## DOUBLE DECK TERMINALS - PRKD/PSLD 2.5 - 4MM<sup>2</sup>

PRKD, PSLD

27036.6

PRKD 2.5 Grey, 2.5mm<sup>2</sup> double deck terminal

- Push In technology
- Linked options
- Colour marked versions
- 1 in 2 out 4mm<sup>2</sup> version
- Earth variants

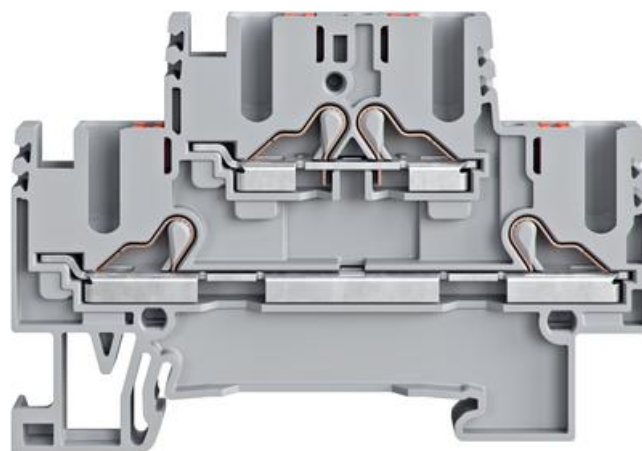

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

|                          |                         |
|--------------------------|-------------------------|
| Rated wire cross section | 2,5 mm <sup>2</sup>     |
| Colour                   | Grey                    |
| Rated voltage IEC        | 500 V                   |
| Rated current IEC        | 22 A                    |
| Mounting                 | Mounting rail TS 35/7.5 |
| Rated impulse voltage    | 6 kV                    |
| Overvoltage category     | III                     |
| Contamination degree     | 3                       |

#### DIMENSIONS

|                  |         |
|------------------|---------|
| Length           | 68,7 mm |
| Width            | 5,1 mm  |
| Height TS 35/7.5 | 47,2 mm |
| Height           | 45,7 mm |

#### CONNECTION DATA

|                             |       |
|-----------------------------|-------|
| Connections                 | 2 x 2 |
| Number of levels            | 2     |
| Plug gauge acc. EN 60 947-1 | A3    |
| Cross connect channels      | 2     |

|  |                      |
|--|----------------------|
| Cross section single wire from           | 0,14 mm <sup>2</sup> |
| Cross section single wire to             | 4 mm <sup>2</sup>    |
| Cross section stranded wire from         | 0,14 mm <sup>2</sup> |
| Cross section stranded wire to           | 2,5 mm <sup>2</sup>  |
| Cross section stranded with ferrule from | 0,14 mm <sup>2</sup> |
| Cross section stranded with ferrule to   | 2,5 mm <sup>2</sup>  |
| Rated wire cross section from            | 26 AWG               |
| Rated wire cross section to              | 12 AWG               |
| Stripping length                         | 10 mm                |

**MATERIALS**

|                            |               |
|----------------------------|---------------|
| Insulation material        | Polyamide 6.6 |
| Flammability class         | UL94-V0       |
| Operating temperature from | -40 °C        |
| Operating temperature to   | 120 °C        |

**ADDITIONAL DATA**

|                               |          |
|-------------------------------|----------|
| Tariff code                   | 85369010 |
| Country of origin             | CZ       |
| Weight                        | 10,31 g  |
| Pack size                     | 50       |
| Number of terminals per level | 2        |

