

QUARTER-TURN VIBRATION RESISTANT 18 MM

You design this vibration resistant quarter-turn latch to accommodate your needs by combining your choices of housing, nut, insert, washer, screw and cam. The latch can be delivered un-assembled, pre-assembled with enclosed cam or fully assembled.

The latch clicks to open and closed positions with good tactile feedback.

Vibration resistant according to DIN EN 61373. Available with IP66 protection and waterproof according to NEMA 4.



MATERIAL

Housing: Zinc die cast, chrome plated, black texture powder coated, zinc plated with black PA6 collar or glass fiber reinforced Polyamide PA6, black

Insert: Zinc die cast, chrome plated or black texture powder coated

Cam and screw: Steel, zinc plated

Standard nut: Zinc die cast, zinc plated

Earthing nut: Zinc die cast, zinc plated

Washer: Stainless steel 304

RELATED PRODUCTS

Cams: 2-481, 2-491, 2-510, 2-520

Accessories: 2-420, 2-590

Similar products: 2-120

Inserts: 2-022

Keys: 2-372, 2-380, 2-370

Housings: 2-021



Handles and knobs: 2-360

Use Product ID at industrilas.com

TESTS & STANDARDS

Cut out: COMBI

Standards: IP66, NEMA 4, DIN EN 61373

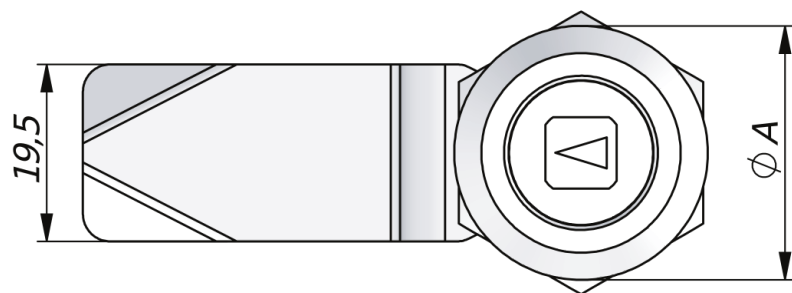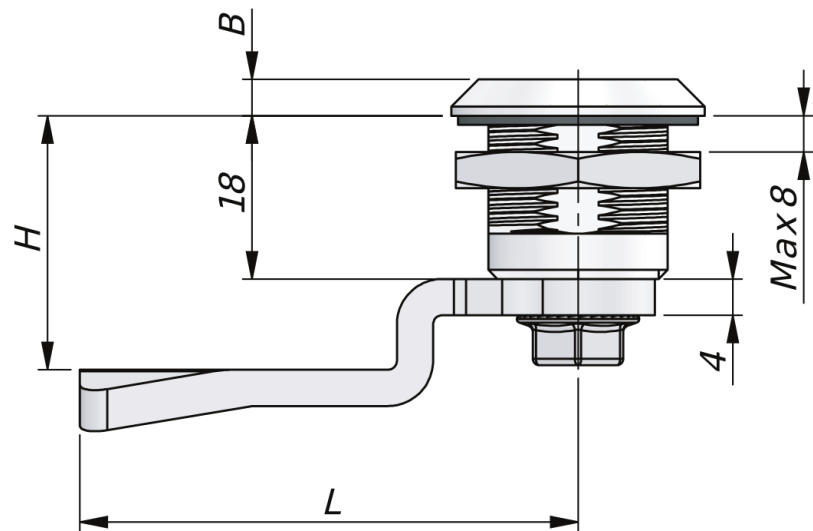

Industrilas
— When access counts —

Make your selections in each column to create your article number (AAAA-BCCDEF-HLL)

AAAA Housing	B Nut	CC Insert	D Surface - insert	E Assembly	F Cam	HHLL H/L in mm
2412 Zinc, chrome plated A=28, B=4	0 SN	01 Square 6	2 Chrome	0 IP54, not assembled	0 Steel	0000 No cam
2415 PA6, black A=28, B=4	1 EN	03 Square 7	6 Black	1 IP65, not assembled		0445 4/45
2416 Zinc, black coated A=28, B=4	2 SN+TUF	05 Square 8		2 IP54, enclosed cam		0645 6/45
2422 Zinc, chrome plated A=32, B=6	4 EN+TUF	07 Square 8 - slotted		3 IP65, enclosed cam		0845 8/45
2425 PA6, black A=32, B=6		08 Square 8 / M6		4 IP54, assembled		1045 10/45
2426 Zinc, black coated A=32, B=6		11 Square 8 - recessed		5 IP65, assembled		1245 12/45
2442 Zinc, PA6 collar A=28, B=4		14 Triangle 7		6 PUR, not assembled		1445 14/45
		15 Triangle 8		7 PUR, enclosed cam		1645 16/45
		16 Triangle 10		8 PUR, assembled		1845 18/45
		17 Triangle 10 / M5				2045 20/45
		18 Triangle 10 / M6				2245 22/45
		19 Triangle 10 / SEN				2445 24/45
		21 Triangle 10 - radius ES3				2645 26/45
		22 Double Bit 3				2845 28/45
		24 Double Bit 5				3045 30/45
		26 Slotted				3245 32/45
		28 Slotted with arrow				3445 34/45
		29 Slotted recessed				3645 36/45
		31 Hexagon 8,5				3845 38/45
		32 Hexagon 11				4045 40/45
		34 Recessed hexagon 8				4245 42/45
		35 Recessed hexagon 10				4445 44/45
		36 Recessed hex 8 / 3 mm pin				4645 46/45
		37 Solid - plug				4845 48/45
		38 Stockholm Energy				5045 50/45
		39 Triangle 10 - radius				

SN = Standard nut. **EN** = Earthing nut

TUF = Assembled with TUF-lock screw to achieve DIN EN 61373

To fulfill DIN EN 61373 the latch can be supplied with screw with mechanical thread lock, see column B (Nut).

PUR-gasket can not be supplied on housings with PA6 collar.

