



QUARTER-TURN VIBRATION RESISTANT 18 MM

This vibration resistant quarter-turn latch has integrated padlock loop. When a padlock is placed in the loop, the insert is blocked from access. The latch consists of your choice of housing, nut, insert, washer, screw and cam.

Classified as IP65 and waterproof according to NEMA 4 by using an O-ring on the insert and a flat gasket on the housing.

The latch clicks to open and closed positions with good tactile feedback. Vibration resistant according to DIN EN 61373.

The latch is delivered un-assembled, pre-assembled with enclosed cam or fully assembled.



MATERIAL

Earthing nut: Zinc die cast, zinc plated

Housing: Zinc die cast, chrome plated or black texture powder coated

Insert: Zinc die cast, chrome plated or black texture powder coated

Cam, screw and washer: Steel, zinc plated

Standard nut: Zinc die cast, zinc plated

RELATED PRODUCTS

Cams: 2-481, 2-491


Keys: 2-370

Use Product ID at industrilas.com

TESTS & STANDARDS

Cut out: COMBI

Standards: IP65, NEMA 4, DIN EN 61373

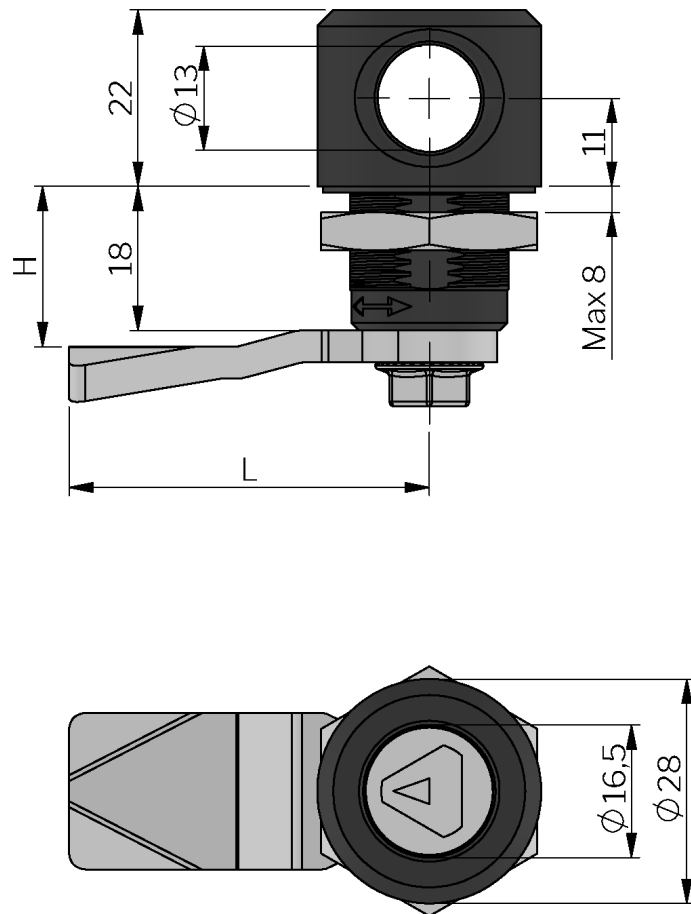

Industrials
When access counts

Make your selections in each column to create your article number (AAAA-BCCDEF-HHLL)

AAAA Housing	B Nut	CC Insert	D Surface - insert	E Assembly	F Cam	HHLL H/L in mm
2232 Zinc, chrome plated	0 SN	01 Square 6	2 Chrome	0 IP54, not assembled	0 Steel	0000 No cam
2236 Zinc, black powder coated	1 EN	03 Square 7	6 Black	1 IP65, not assembled		0445 4/45
		05 Square 8		2 IP54, enclosed cam		0645 6/45
		07 Square 8 - slotted		3 IP65, enclosed cam		0845 8/45
		08 Square 8 / M6		4 IP54, assembled		1045 10/45
		11 Square 8 - recessed		5 IP65, assembled		1245 12/45
		14 Triangle 7				1445 14/45
		15 Triangle 8				1645 16/45
		16 Triangle 10				1845 18/45
		17 Triangle 10 / M5				2045 20/45
		18 Triangle 10 / M6				2245 22/45
		19 Triangle 10 / SEN				2445 24/45
		21 Triangle 10 - radius ES3				2645 26/45
		22 Double Bit 3				2845 28/45
		24 Double Bit 5				3045 30/45
		26 Slotted				3245 32/45
		28 Slotted with arrow				3445 34/45
		29 Slotted recessed				3645 36/45
		31 Hexagon 8,5				3845 38/45
		32 Hexagon 11				4045 40/45
		34 Recessed hexagon 8				4245 42/45
		35 Recessed hexagon 10				4445 44/45
		36 Recessed hex 8 / 3 mm pin				4645 46/45
		37 Solid - plug				4845 48/45
		39 Triangle 10 - radius				5045 50/45

SN = Standard nut. EN = Earthing nut.

