

Technical data sheet

Load monitoring · LOCC-Box-NET-SC

Electronic load monitoring up to DC 5 A, with communication
Single-channel design, Adjustable current range: DC 1 A – 5 A
Adjustable characteristics, fast, medium-speed, slow 1



Identification

Type	LOCC-Box-Net-SC 7-6418
Part No.	716418

Product version

Hardware revision	2.0
Software version	2.6
Datasheet version	02

Input

Type of function	1-channel 1 pin switching
Rated voltage U_N	DC 12/24 V
Operation voltage range	DC 10–30 V
Rated current I_N	DC 5 A
Supply current	DC 40 A over Cu-rails 10 × 3 mm
Reverse voltage protection	internal electronics
Connection type input	screwless contact slide

Control input (Set / Reset)

Signal level	DC 12/24 V acc. to EN 61131
OFF	Pulse with falling edge >100 ms, <800 ms
ON	Pulse with falling edge > 1 s

Output

Switching element	MOSFET
Output current	max. DC 5 A
Voltage drop	max. 90 mV (5 A)
Status display output	LED green: operating voltage present, no error LED red: error in load circuit

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

28.09.2022 • Subject to technical modification

Part No. [716418](#) • Datasheet version: 02

page 1 of 5

Technical data sheet

Load monitoring · LOCC-Box-NET-SC

Switch-on capacity	Optional
Current range	1 A – 5 A (adjustable via switch in 1 A steps)
Characteristic	fast (1), medium (2), slow 1 (3) see 'Characteristic curves'

Signal output

Signal level	DC 12/24 V: operating voltage on standby, no error, DC 0 V: error, output switched off, and manual "OFF" (parameterized)
Switching element	Transistor, collector with pull-up resistance

General

Dimensions (w × h × d)	8.1 mm × 107.4 mm × 116.0 mm
Housing material	PA 6.6 (UL 94 V-0, NFF I2, F2)
Color of the housing	basalt grey
Mounting	DIN rail mountable TS35 (EN 60715)
Installation position	Any
MTBF	690000 h
Degree of protection	IP20 (only as complete system with power terminal and end block)
Connection type	Push-In 0.25 mm ² – 2.5 mm ² AWG 24 – AWG 14
Weight/unit	0.07 kg
PU (units)	1


General ambient conditions

Operation temperature range	-25 °C ... +50 °C
Storage temperature range	-40 °C ... +85 °C
Relative air humidity	10 % – 95 %, without condensation
Vibration resistance	4 g acc. to EN 60068-2-6
Shock resistance	15 g acc. EN 60068-2-27


Approvals/Standards

Conformity	CE UKCA
Approvals	cULus (E135145) URus (E490188)
Standards	EN 61000-6-2 EN 61000-6-3 UL 60947-5-1 UL 2367 DNVGL-CG-0339 Temperature Class D – not certified Humidity Class B – not certified Vibration Class B – not certified EMC Class A – not certified Enclosure Class A – not certified


Dimensions

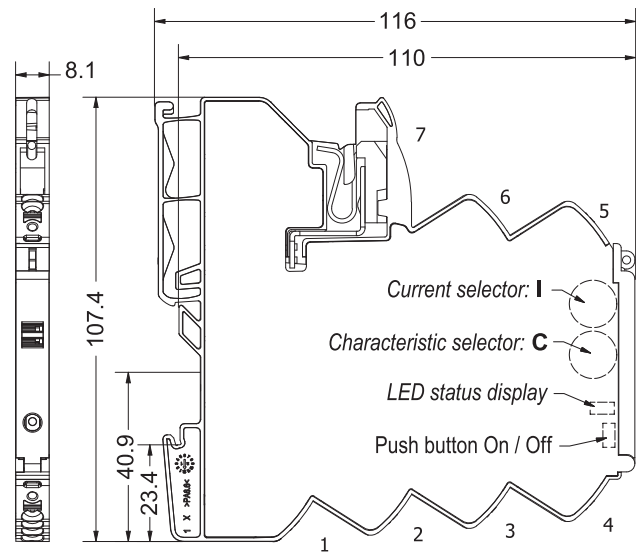


PIN assignment




1: Characteristic fast

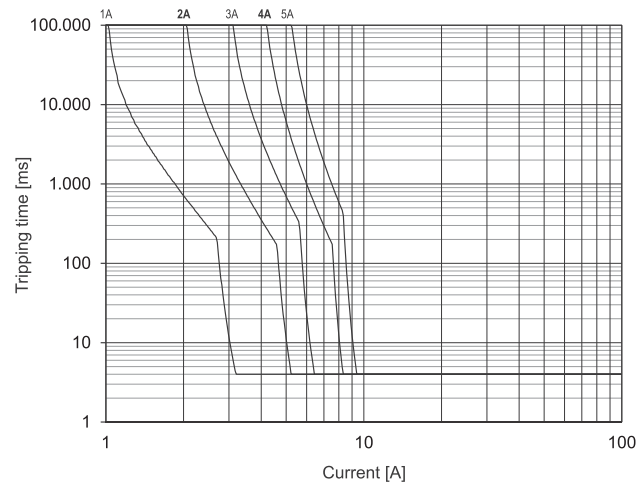

2: Characteristic medium

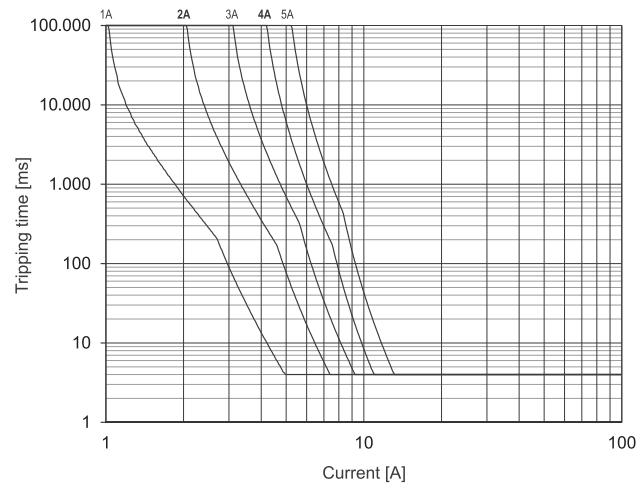

3: Characteristic slow-1

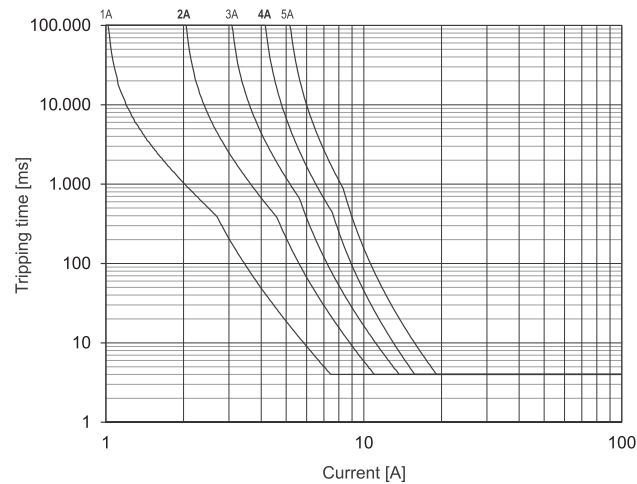

LED status


LED Status, Button, Rotary Switch

LED green	ON	Function is OK*
LED green, flashing 1 Hz	Overload	Load above 90 % of I nominal
LED green, flashing 5 Hz	Overload	Load above 100 % of I nominal
LED red	OFF	Module switched off or acknowledged*
LED red, flashing 1 Hz	Overload	Output off due to overload/short circuit*
LED red, flashing 5 Hz	Error	Wiring error – feedback (internal error)
LED red, flashing shortly	OFF	Output off via remote set/reset
LED red/green, flashing 1 Hz	ON	Target settings via rotary switch deviate from actual settings. NOTICE: Switching off and on via pushbutton required.
Button ***	ON/OFF	Nominal operation: ON/OFF Load monitoring tripped: 1st push: acknowledge 2nd push: ON
Rotary Switch (I) – Switch Position**	Rated current, see page 4.	
Rotary Switch (C) – Switch Position**	Characteristic: 1: fast 2: middle 3: slow-1 4: slow-2 5: slow-3	

* If the operating voltage is switched off, the last status is saved (Default).
 ** Accept the setting - after switching on again via the button, not by Remote Set/Reset
 *** Master function - switch off via push button, can only be switched on again via push button

For further information see also the operating instructions

Signal output

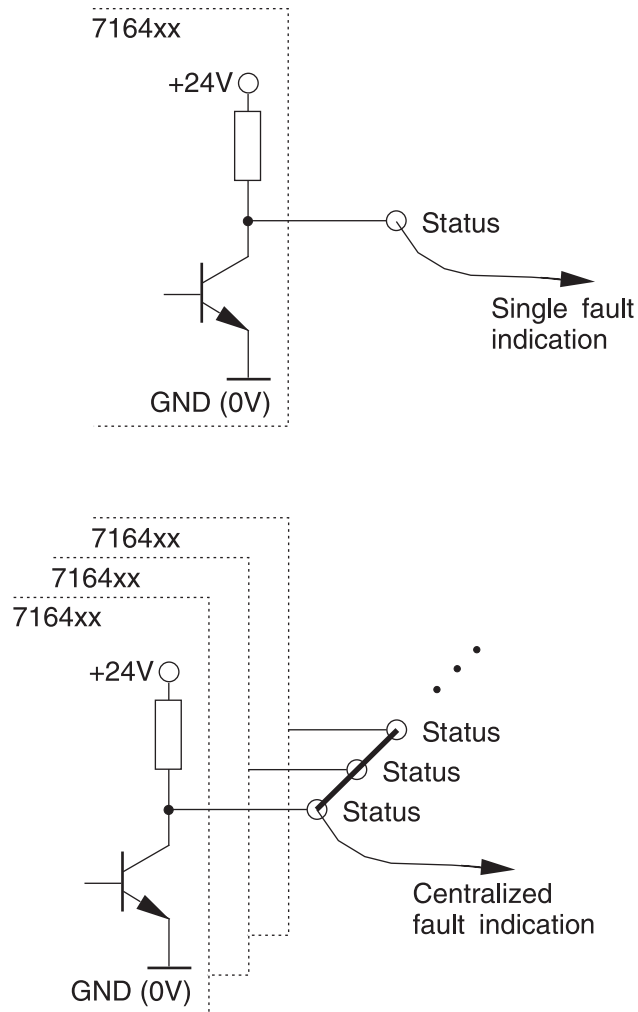

Mounting diagram

