BACO

Request form for specific cam switch

Fill in one form for each type of switch

APPLICATION

❑ Load switching
❑ resistive ❑ electromagnetic

Rated voltage ..... AC/DC

Rated current ..... A

❑ Control of motors
❑ Starting/Switching off a running motor

❑ Reverse direction of rotation
Motor rating ..... A/CV/kW

DIAGRAM

(Fill in the grid below using the appropriate symbols)

Closed contact

Closed contact, 2 positions without cut-off

Overlapping: second contact closes before first contact opens (not possible with 30° switching angle)

Impulse contact, closes momentarily when switching from one position to next

Spring return

Contact Nos. Terminals	Position No. 1	2	3	4	5	6	7	8	9	10	11	12	connection + links
1-2													❍ 1 3 ❍
3-4													❍ 2 4 ❍
5-6													❍ 5 7 ❍
7-8													❍ 6 8 ❍
9-10													❍ 9 11 ❍
11-12													❍ 10 12 ❍
13-14													❍ 13 15 ❍
15-16													❍ 14 16 ❍
17-18													❍ 17 19 ❍
19-20													❍ 18 20 ❍
21-22													❍ 21 23 ❍
23-24													❍ 22 24 ❍
25-26													❍ 25 27 ❍
27-28													❍ 26 28 ❍
29-30													❍ 29 31 ❍
31-32													❍ 30 32 ❍
33-34													❍ 33 35 ❍
35-36													❍ 34 36 ❍
37-38													❍ 37 39 ❍
39-40													❍ 38 40 ❍
41-42													❍ 41 43 ❍
43-44													❍ 42 44 ❍
45-46													❍ 45 47 ❍
47-48													❍ 46 48 ❍

SWITCHING ANGLE

❑ 90° ❑ 60° ❑ 45° ❑ 30°
(indicate positions in boxes)
Blocking-off between ..... and ..... position
One-way rotation: ❑ right ❑ left

MOUNTING

❑ Front ❑ One-hole
❑ Rear ❑ DIN rail
❑ Enclosure

STANDARD PRESENTATION

❑ Handle: ❑ small
❑ medium
❑ large

❑ Lever: ❑ small ❑ large
Colour: ❑ grey ❑ black
❑ red

❑ Selector switch style handle

❑ With key
Choice of key: ❑ 455 ❑ 1424 A
❑ other.....

LEGEND PLATE AND ENGRAVING

Choice of legend plate:
❑ 48 ❑ 64 ❑ 72 ❑ 96
❑ Alu ❑ Black ❑ Red ❑ Yellow

SWITCHING ANGLE

❑ **Engraving:** (use opposite box to specify your engravings)
❑ linear
❑ polygonal

❑ Duty label
(2 x 13 characters) :

... ...
... ...

PADLOCKABLE PRESENTATION

Colour: ❑ yellow/red ❑ grey
Size: ❑ 48 ❑ 72 ❑ 96

OPTIONS

❑ Foolproof handle
❑ IP rating: ❑ IP 40 (standard)
❑ IP 55
❑ IP 65
❑ Terminal covers
❑ Tropicalised version

MARKING OF POSITIONS

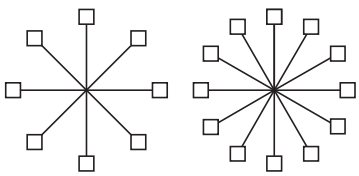

YOUR DETAILS

Company: .....
.....
.....
Name and surname: .....
.....
Address: .....
.....
.....
E-mail : .....
Tel: .....
Fax: .....

COMMENTS

YOUR ENGRAVINGS