


Continuous level sensors


W1

IP65 housing
Potentiometric outputs
4–20 mA; 0–5 V; 0–10 V




S1

DIN 43650 IP 65 plug
Potentiometric outputs




S1

DIN 43650 IP 65 plug
4–20 mA; 0–5 V;
0–10 V output




P1-P2

P1 brass cable gland IP68
P2 polyamide cable gland IP67
Potentiometric outputs





P1-P2

P1 brass cable gland IP68
P2 polyamide cable gland IP67
4–20 mA; 0–5 V; 0–10 V output

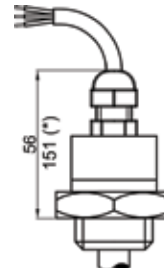

O1

OMNI electric head
4–20 mA output
with digital display

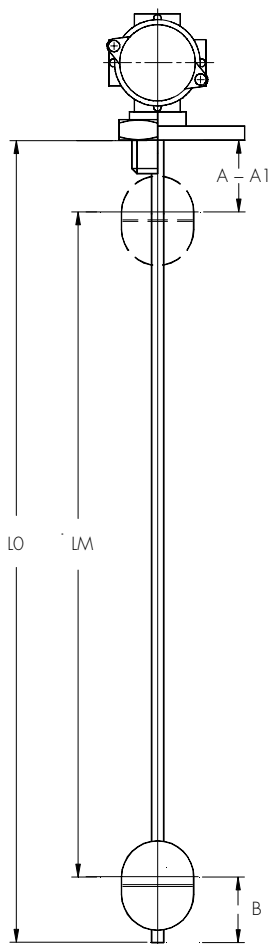

Liquid under control:

Specific gravity:

Max pressure:

Max temperature:

Approvals



Yes ☐ No ☐

Exd ☐

Exi a ☐

Process connection


☐ Threaded: ☐ Flanged:

Material


☐ Brass ☐ Stainless steel AISI-316 ☐ PVC ☐ PP ☐ PVDF

Outputs


☐ Potentiometric output

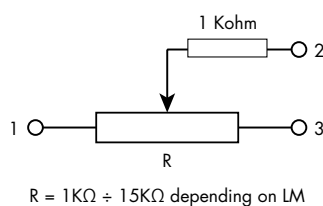


☐ 0–5/0–10 V output

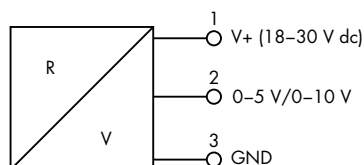

☐ 4–20 mA output

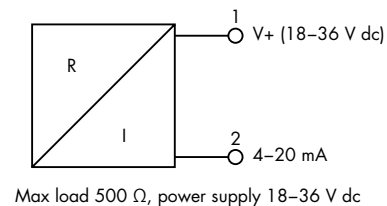

☐ 4–20 mA output with digital display

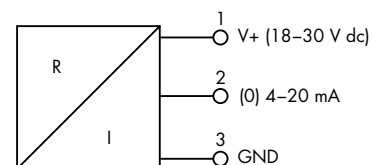

Please return to pressureandflow@oem.co.uk

OEM Automatic, Whiteacres, Whetstone, Leicester LE8 6ZG • Tel: 0116 284 9900