

Vision is
our mission®

Mast Cable 3m 7F
Article no. 0304460

Mast Cable 4m 7F
Article no. 0304470

Mast Cable 5m 7F
Article no. 0304480

Mast Cable 8m 7F
Article no. 0304490

Mast Cable 9m 7F
Article no. 0304560

Mast Cable 10m 7F
Article no. 0304570

Mast Cable 11m 7F
Article no. 0304580


Mast Cable 17m 7F
Article no. 0304590

2018 • DS0960042 EN A 08

Product Data



Dimensions

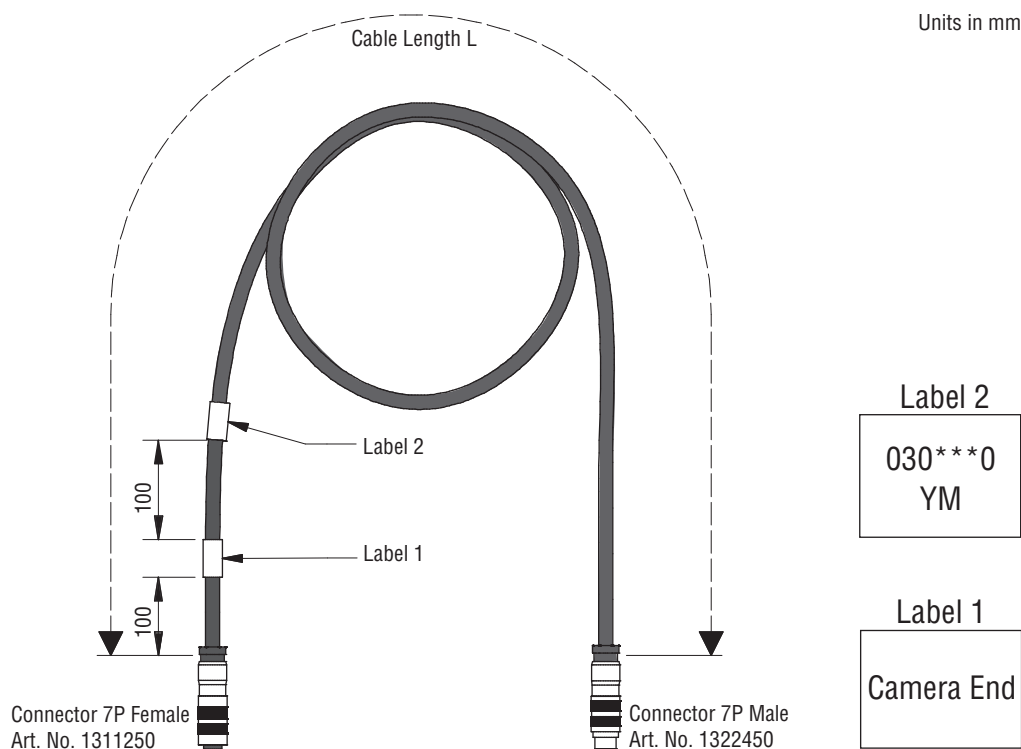

TECHNICAL DATA

Mast cable 3 - 17m 7P

	Description							
Article number	0304460	0304470	0304480	0304490	0304560	0304570	0304580	0304590
Cable length	3m.	4m.	5m.	8m.	9m.	10m.	11m.	17m.
Connectors	7 pins PG 9 Gold 423, IP67.							
Cable	Mast Cable, Art no 1220600, 7 x 0,10 mm SCWS, 5 x AWG24 19 x 0,13mm TPC Color: Black, Red, Orange, Yellow, Grey. Jacket Black, PUR, Bending radius: 80 mm.							
Approvals	UV-resistant, oil resistant and Halogen free. Wires according UL Style 1589 Cable according UL Style 20963.							
Fire resistance	VW1 (UL 1581).							
Temperature range	-40°...+85°C.							


Solder side
7P Male connector

Electrical connection

Soldering of connectors (female 1311250 + male 1322450)

1 = Video
2 = Video GND
3 = Power input
4 = 0V
5 = Aux 1
6 = Aux 2
7 = Aux 3

Solder side
7P Female connector

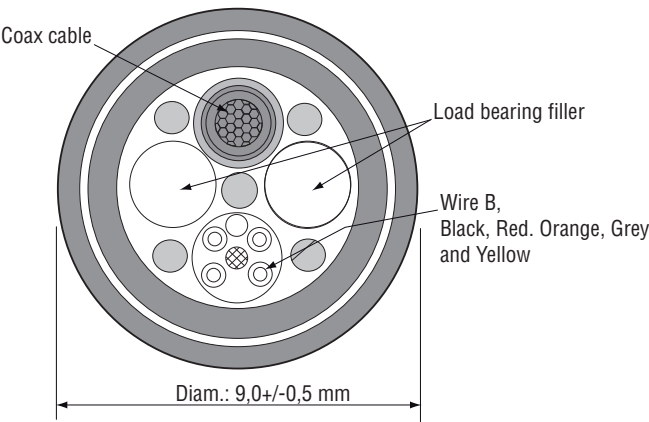

All data subject to change without notice. All dimensions are for commercial purpose only.
 The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.
 All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

