

Vision is
our mission®

Product Data

Cable 1,5m m4M m4F Armored

Article no. 0303342

Cable 3m m4M m4F Armored

Article no. 0303352

Cable 7,5m m4M m4F Armored

Article no. 0303362

Cable 9m m4M m4F Armored

Article no. 0303372

Cable 5m m4M m4F Armored

Article no. 0303472

Cable 11m m4M m4F Armored

Article no. 0303482

Cable 16m m4M m4F Armored

Article no. 0303492

Cable 20m m4M m4F Armored

Article no. 0305021


Cable 28m m4M m4F Armored

Article no. 0305011

2018 • DS0960033 EN A 01



Dimensions

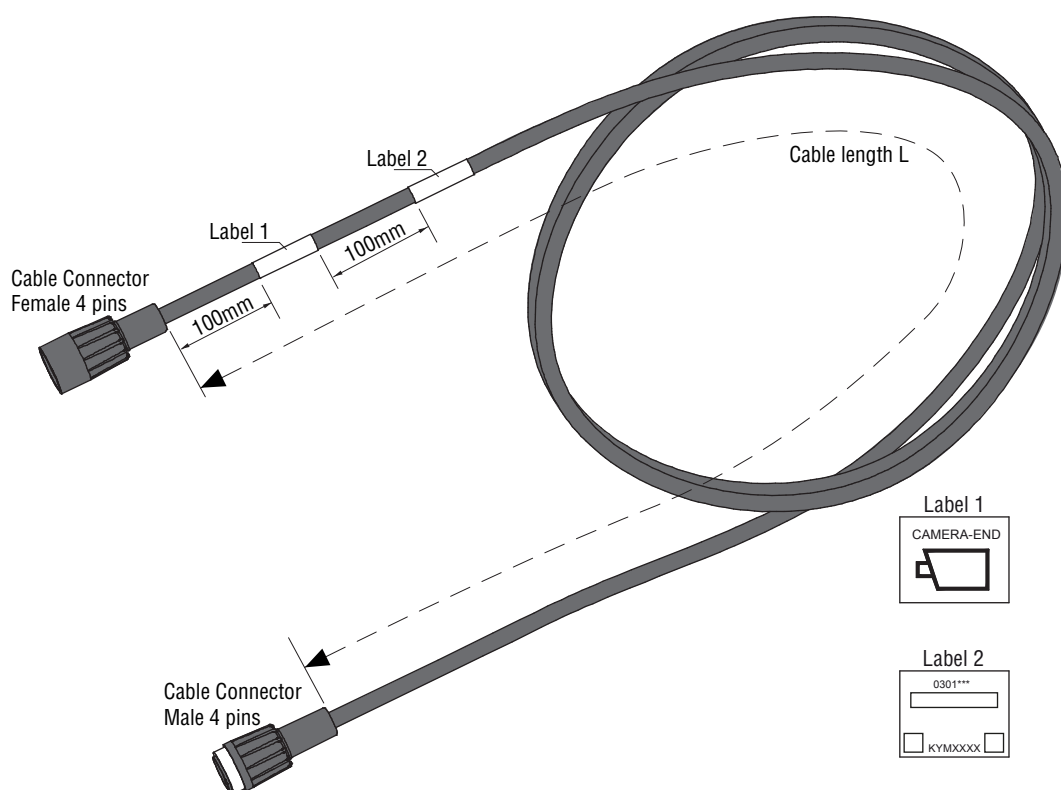


TECHNICAL DATA

Cable *m m4M m4F Armored



	Description								
Article number	0303342	0303352	0303362	0303372	0303472	0303482	0303492	0305021	0305011
Length	1,5m	3,0m	7,5m	9,0m	5,0m	11,0m	16,0m	20,0m	28,0m
Approvals	IEC 60332-3-25 Cat. D Standards USA UL 1581 IEEE 383 CM/CL2								
Protection connectors	IP67								
Weight	110 gr/m ¹								
Temperature range	-30°C..+80°C (static)								
Min. bending radius	87mm (static)								

Impedance (coax)	Coaxial cable
Core	75 Ohm
Dielectricum	AWG26 19 x 0.1
Shield	Foam skin polyethylene
Shield material	Braided ≥ 85%
Coax overall isolation	Tin plated copper
	Polyester foil

Wires	Build up cable
Tape #1	3x AWG 26, 2x AWG 20
Shielding	Polyester
Jacket #1 diameter	Braided ≥ 85%
Jacket Material	6.0 ± 0.2
Armoring	PVC
Tape #2	Armoring Galvanized steel wire braid coverage >75%
Jacket #2 diameter	TNT
Jacket thickness	8.7mm +0/-0.3mm
Jacket Material	> 0.8mm
	PUR Mud and oil resistance

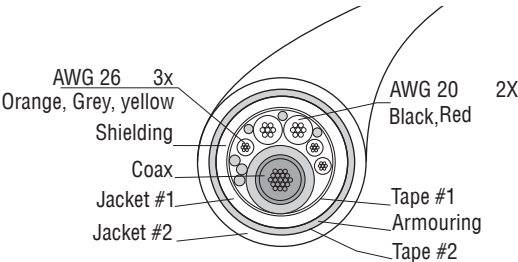

Electrical connection

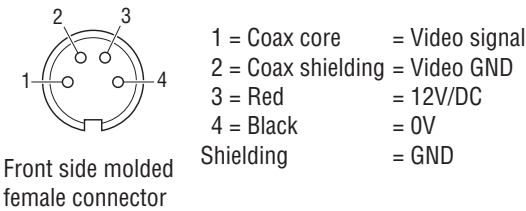

All data subject to change without notice. All dimensions are for commercial purpose only.
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.
All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

