
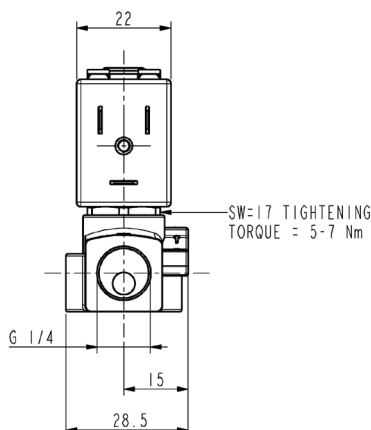
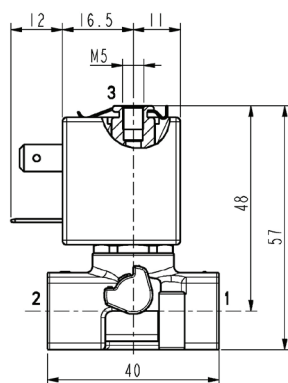



ASCO™ SOLENOID VALVE

3/2 NORMALLY CLOSED – DIRECT ACTING - G 1/4

SERIES
L376

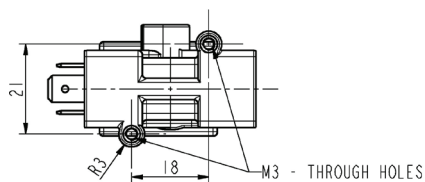

General Features

Direct acting solenoid valve.

Suitable to shut off liquid and gaseous fluids (verify the compatibility of fluid with material in contact)

Technical Features	
Maximum allowable pressure (PS)	50bar
Opening time	~10ms
Closing time	~10ms
Fluid temperature	-10°C +130°C
Max viscosity	5°E (~37 cStokes or mm²/s)

Materials in Contact with Fluid	
Body	Brass
Sealing	FPM
Internal components	Stainless steel
Seat	Brass
Core tube	Stainless steel
Shading coil	Copper

Coil	ZB10A	ZB12A	ZB14A
Approval	/	UL and CSA	UL and CSA
Encapsulation material	PA fiberglass reinforced	PET fiberglass reinforced	PET fiberglass reinforced
Insulation class	F (155°C)	F (155°C)	H (180°C)
Ambient temperature	-10°C +60°C	-10°C +60°C	-10°C +75°C
Continuous duty	ED 100%		
Electric connection	DIN 46340 - 3 poles plug connector		
Protection degree	IP 65 (EN 60529) with plug connector	IP 67 (EN 60529) with plug connector	IP 67 (EN 60529) with plug connector
Voltages	DC	12-24V (+10% -5%)	
	AC	24V/50-60Hz - 115V/50Hz - 230V/50-60Hz (+10% -15%) (Other voltages and frequencies on request)	

Port size ISO 228	Orifice size (mm)		Differential pressure (bar)				Kv (m³/h)		Series and type		Power absorption				Sealings	Notes	Weight (kg)	
			Δp min	Δp max							AC (VA)		DC					
				Gases		Liquids			Inrush	Holding		DC						
	1↔2	1↔3	0	AC	DC	AC	DC	1↔2	1↔3	Valve	Coil	VA	VA	W				W
G 1/4	1,6	1,2	10	10	10	10	0,08	0,05	L376V03C	ZB10A ZB12A	12	6	4	5,5	FPM	1	0,205	
	2,4	1,2	4	4	4	4	0,14	0,05										

Notes


- Sealings: FPM = Fluoro-carbon elastomer
- On request:
 - body valve in stainless steel AISI 316L: L376V07
 - version with manual override: L376V01
 - coil in class H (ZB14A – see § “COIL”)

1 – ZB12A and ZB14A coils fitted with sealing gaskets underneath and on the upper part (see sectional view on the back)

SERIES
L376

ASCO™ SOLENOID VALVE
3/2 NORMALLY CLOSED – DIRECT ACTING - G 1/4

Spare Parts

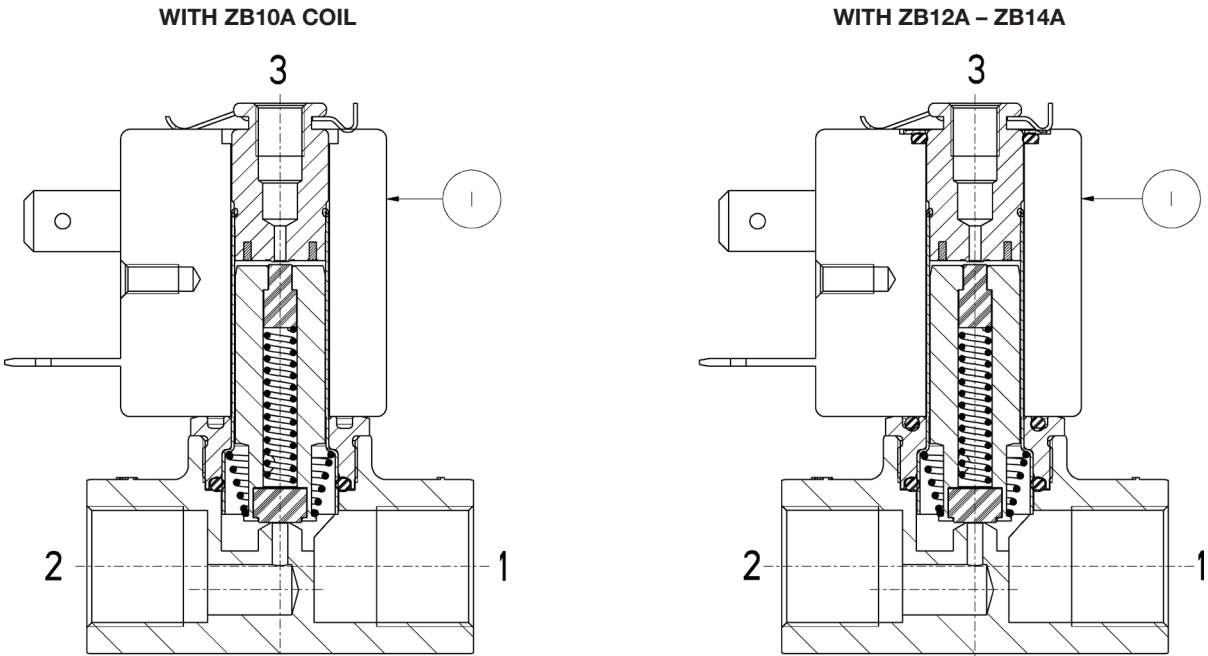

Kit description	Kit P.N.	Consisting of:
Coil	ZB10A ZB12A ZB14A	Coil pos. 1

Installation

- Solenoid valve can be mounted in any position; vertical with coil upwards preferred.

THE VALIDITY OF REPORTED DATA IS REFERRED TO THE DATE OF ISSUE. POSSIBLE UPDATES ARE AVAILABLE ON REQUEST