
Model KR20 Standard Type

Model KR20 A (with a Single Long Nut Block) Model KR20 B (with Two Long Nut Blocks) For model number coding, see **2-96**.



Stroke (mm) (stroke between mechanical stoppers)		Outer rail length		G	n	Overall main unit mass (kg)	
Туре А	Type B ⁻	(mm)	L₁(mm)	(mm)		Туре А	Туре В
30(41.5)	—	100	159	20	2	0.45	—
80(91.5)	35(45.5)	150	209	15	3	0.58	0.655
130(141.5)	85(95.5)	200	259	40	3	0.72	0.795


*Indicates a value when two inner blocks are in close contact with each other.

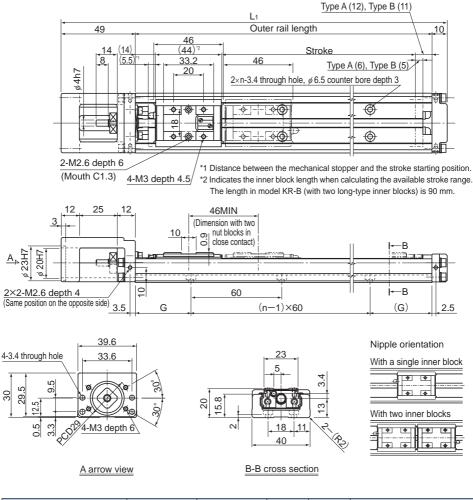


LM Guide Actuator

Model KR20 (with a Cover)

Model KR20 A (with a Single Long Nut Block) Model KR20 B (with Two Long Nut Blocks) For model number coding, see **2-96**.

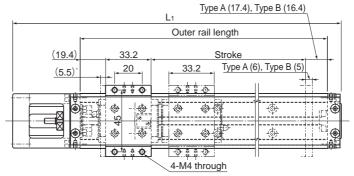

* Distance between the mechanical stopper and the stroke starting position.

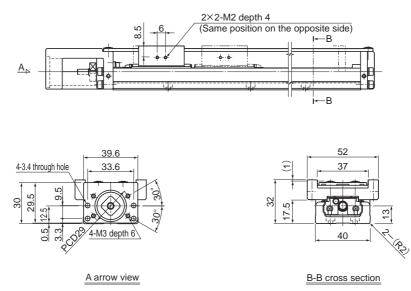

	e (mm) echanical stoppers)	Outer rail length	Overall length	Overall main unit mass (kg)		
Туре А	Type B ⁻	(mm)	L₁(mm)	Туре А	Туре В	
30(41.5)	—	100	159	0.51	—	
80(91.5)	35(45.5)	150	209	0.66	0.78	
130(141.5)	85(95.5)	200	259	0.8	0.92	

*Indicates a value when two inner blocks are in close contact with each other.

Options⇒**▲2-125**

〒光松 ▲2-101