




# Model KR33 (with a Cover)



Model KR33□□C (with a Single Short Nut Block)

Model KR33□□D (with Two Short Nut Blocks)


For model number coding, see **A2-96**.

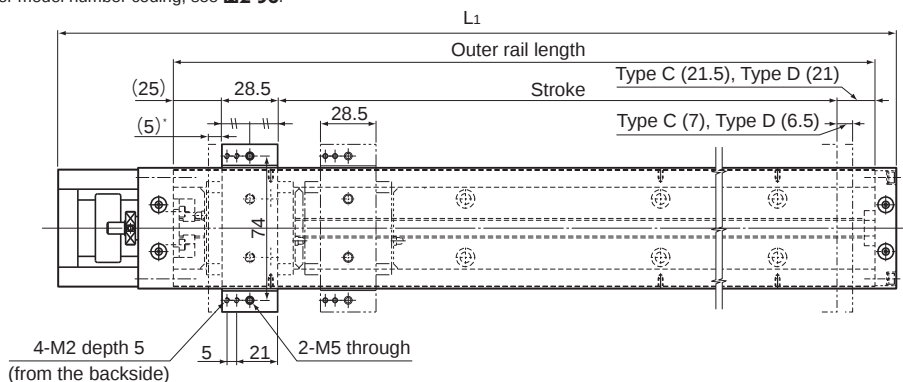

\* Distance between the mechanical stopper and the stroke starting position.

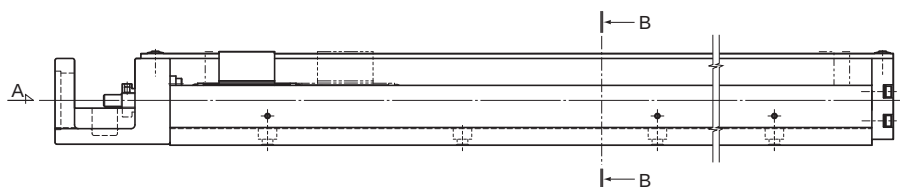

A arrow view



B-B cross section

| Stroke (mm)<br>(stroke between mechanical stoppers) |            | Outer rail length<br>(mm) | Overall length<br>$L_1$ (mm) | Overall main unit mass (kg) |        |
|-----------------------------------------------------|------------|---------------------------|------------------------------|-----------------------------|--------|
| Type C                                              | Type D     |                           |                              | Type C                      | Type D |
| 75(87)                                              | 25(36.5)   | 150                       | 220                          | 1.7                         | 2      |
| 125(137)                                            | 75(86.5)   | 200                       | 270                          | 2.1                         | 2.4    |
| 225(237)                                            | 175(186.5) | 300                       | 370                          | 2.7                         | 3      |
| 325(337)                                            | 275(286.5) | 400                       | 470                          | 3.3                         | 3.6    |
| 425(437)                                            | 375(386.5) | 500                       | 570                          | 4                           | 4.3    |
| 525(537)                                            | 475(486.5) | 600                       | 670                          | 4.7                         | 5      |
| 625(637)                                            | 575(586.5) | 700                       | 770                          | 5.7                         | 5.93   |

\*Indicates a value when two inner blocks are in close contact with each other.

Note) It must be noted that the cover-mounting bolt is 0.2 mm higher than the top face of the top table.