


Model KR65 Standard Type

Model KR6525A (with a Single Long Nut Block)

Model KR6525B (with Two Long Nut Blocks)

For model number coding, see **A2-96**.

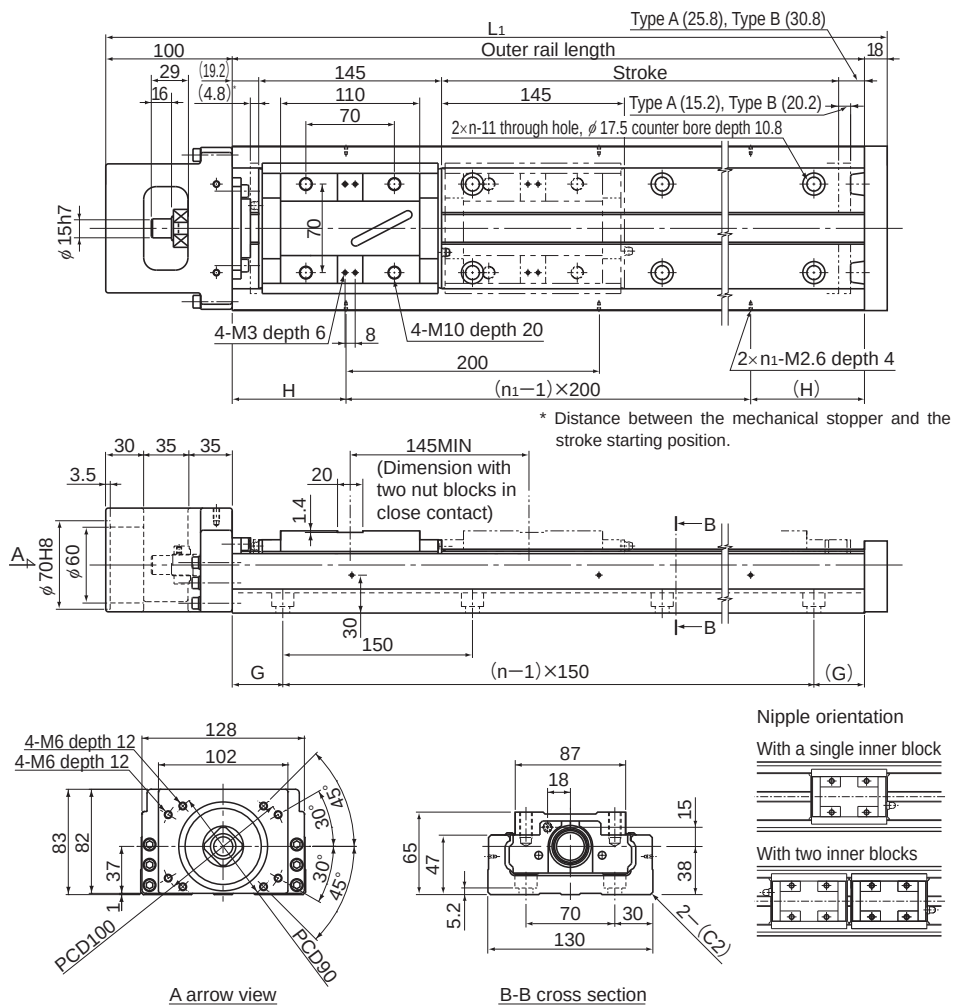

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L_1 (mm)	H (mm)	G (mm)	n	n_1	Overall main unit mass (kg)	
Type A	Type B'							Type A	Type B
790(810)	640(665)	980	1098	90	40	7	5	31.6	34.6
990(1010)	840(865)	1180	1298	90	65	8	6	37	40
1190(1210)	1040(1065)	1380	1498	90	90	9	7	42.4	45.4
1490(1510)	1340(1365)	1680	1798	40	90	11	9	50.5	53.5


*Indicates a value when two inner blocks are in close contact with each other.

Model KR65 (with a Cover)



Model KR6525A (with a Single Long Nut Block)

Model KR6525B (with Two Long Nut Blocks)


For model number coding, see **A2-96**.

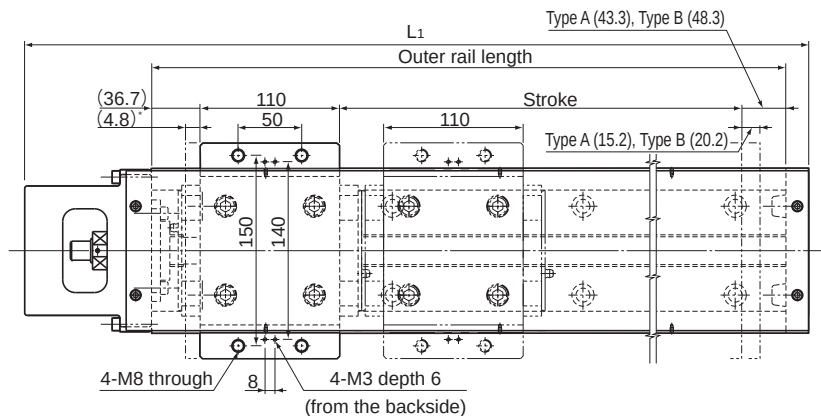

* Distance between the mechanical stopper and the stroke starting position.

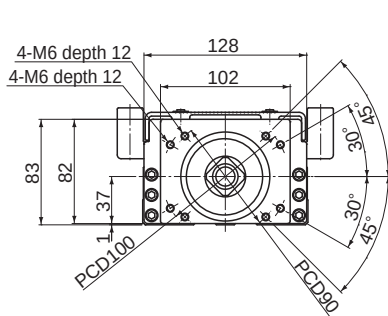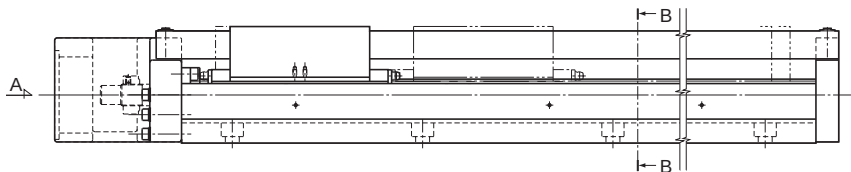

A arrow view

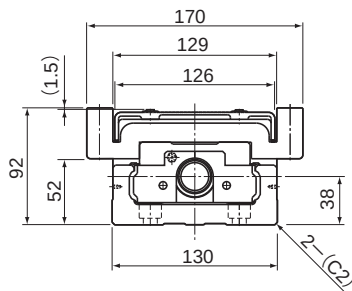

B-B cross section

Stroke (mm) (stroke between mechanical stoppers)		Outer rail length (mm)	Overall length L_1 (mm)	Overall main unit mass (kg)	
Type A	Type B			Type A	Type B
790(810)	640(665)	980	1098	36.3	43
990(1010)	840(865)	1180	1298	42	48.7
1190(1210)	1040(1065)	1380	1498	47.6	54.3
1490(1510)	1340(1365)	1680	1798	56.1	62.8

*Indicates a value when two inner blocks are in close contact with each other.