

On-off level switches chart

W1
W2
E1
S1
P1
C
Cm1

IP65 housing
W1 max 5 terminals Ø70
W2 max 12 terminals Ø100


Exd IP65 housing
Max 12 terminals

DIN 43650 plug
Max 3 terminals

IP68 cable gland
Cable length L...mm

Cable or leads
Cable length L...mm

Cable or leads
Cable length L...mm

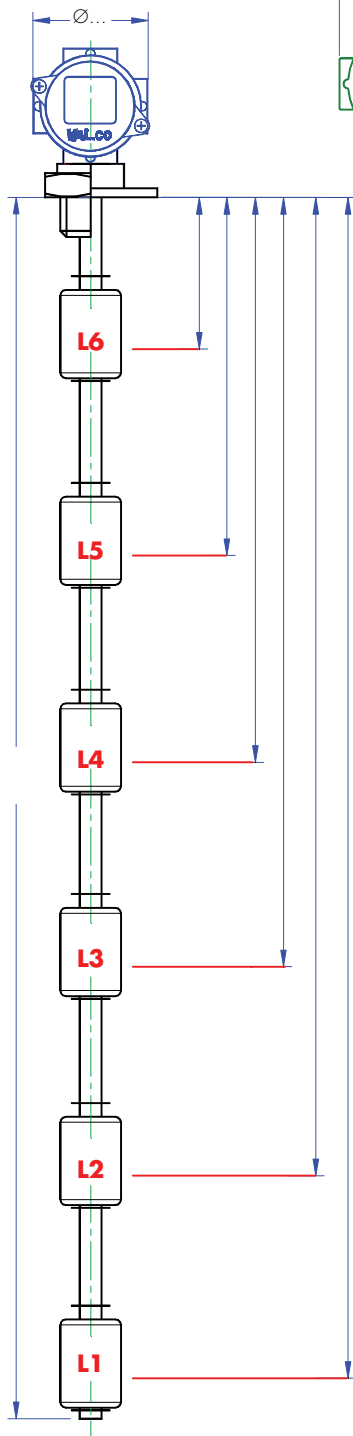

Liquid under control:

Specific gravity:

Max pressure:

Max temperature:

Approvals



Yes ☐ No ☐

Exd ☐

Exi a ☐

Process connection


☐ Threaded: ☐ Flanged:

Material


☐ Brass ☐ Stainless steel AISI-316 ☐ PVC ☐ PP ☐ PVDF

Wirings


☐ Independent contacts NO or NC (max 6 contacts)

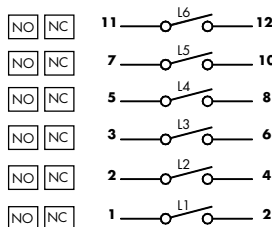


☐ Independent SPDT contacts (max 4 contacts)



☐ Common wired NO or NC contacts (max 6 contacts)

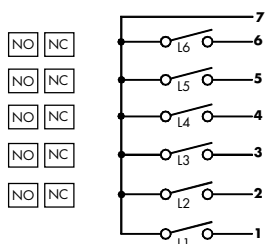

☐ Common wired SPDT contacts (max 5 contacts)



Please return to pressureandflow@oem.co.uk

OEM Automatic, Whiteacres, Whetstone, Leicester LE8 6ZG • Tel: 0116 284 9900