



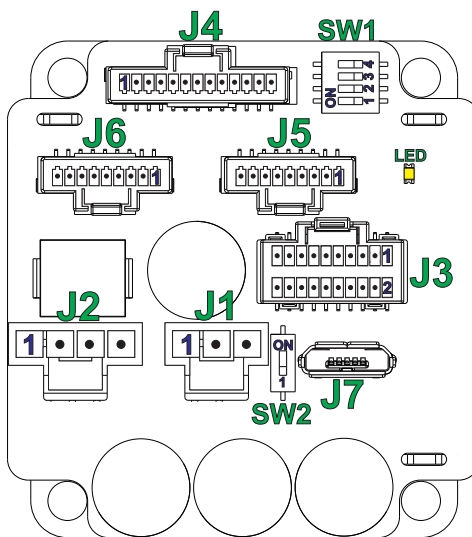
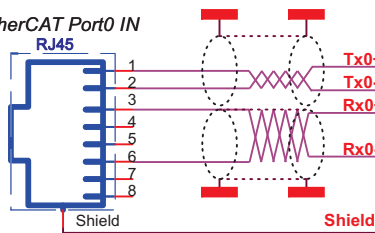


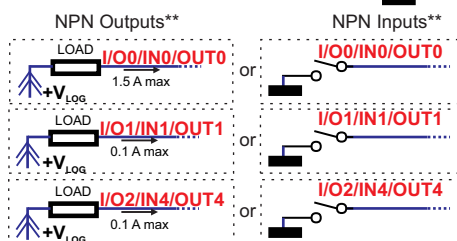










EtherCAT Port0 IN

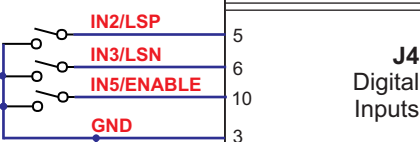

EtherCAT Port1 OUT

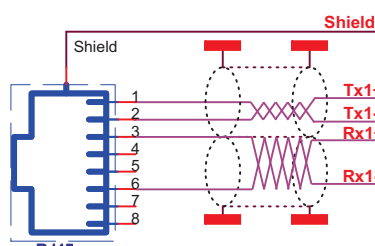

Logic power supply

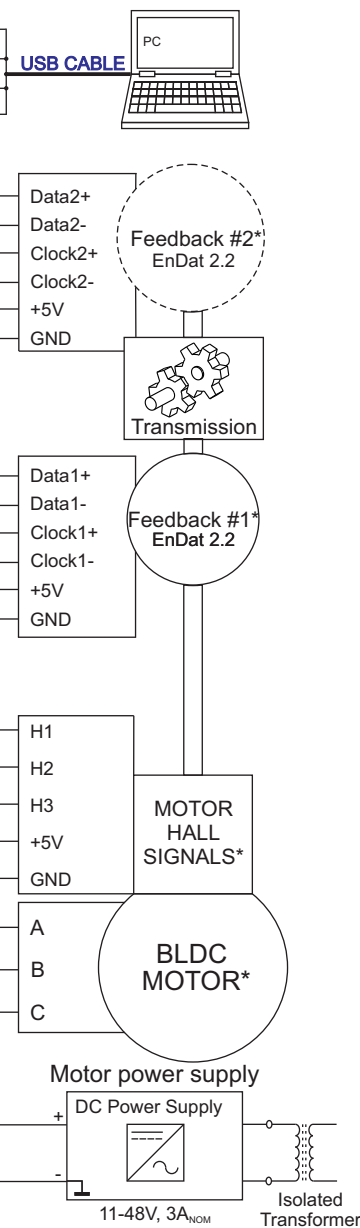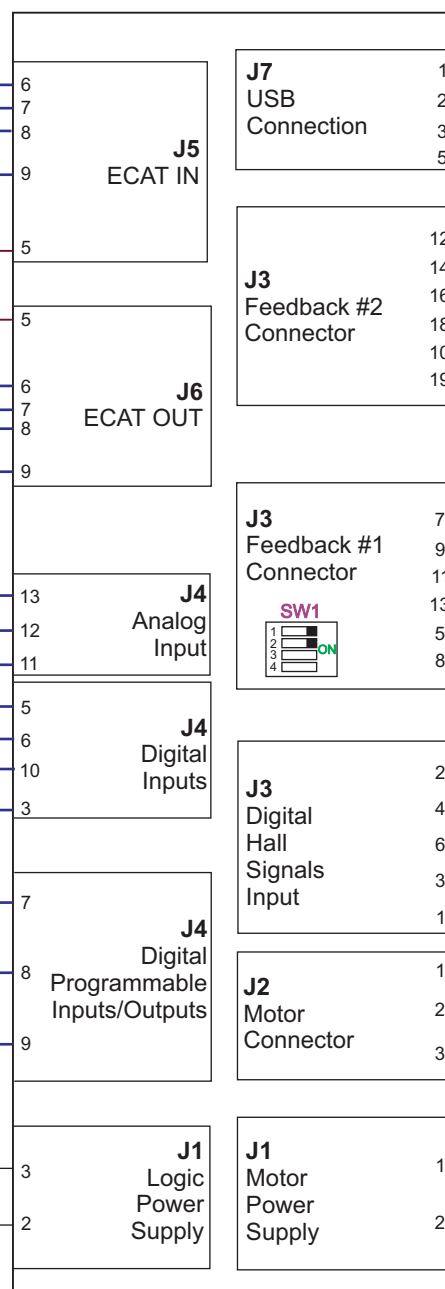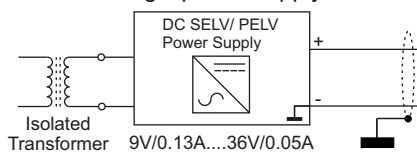

* FOR ALL AVAILABLE OPTIONS CHECK THE USER MANUAL OF THE DRIVE
 ** ANY OF THE THREE PINS ARE SOFTWARE SELECTABLE INDIVIDUALLY AS NPN INPUTS/OUTPUTS