


busbar adapter 250 A, 3-pole (32017)

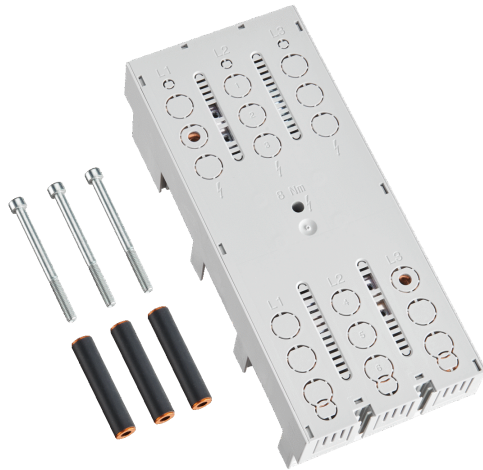

The picture may show a similar product.

Description

Part No.: **32017**000A

EQUES® 60Classic

busbar adapter 250 A, 3-pole

105 x 240

connection to the system top or bottom

for Siemens 3VA12, 3VA20, 3VA21, 3VA22, 3VA52, 3VA61, 3VA62

for busbars 12, 15, 20, 25, 30 x 5, 10 and section busbars

System

60Classic

Product group 05

Subgroup 36

pack size 1

EAN 4021267320171

ECLASS 6.1 27370304

ECLASS 7.1 27370304

ETIM 4.0 EC001531

ETIM 5.0 EC001531

Approvals

Standards

IEC 61439-1:2011

UL 508

Approvals

CSA , UL , DNV GL , EAC



for UL feeder circuits >250V

type number: EPC60250-L

EAC Type: EQ

UL file: E123577, UL category (for USA): NMTR <https://www.ul.com>

UL file: E123577, UL category (for Canada): NMTR7 <https://www.ul.com>

CSA file: 110285, CSA class: 3211-37 <https://directories.csa-international.org>

CCC approval: no certification required

Technical data

Details IEC

Standards

IEC 61439-1:2011

Electrical data IEC

Rated current (IEC): 250 A

rated voltage (IEC) AC: 690 V

rated isolation voltage U_i AC: 800 V

rated surge voltage U_{imp} : 6 kV

short-circuit
withstandability: the short-circuit capacity of the combination of adapter and MCCB
depends on the MCCB

power dissipation of the article:

The power dissipation at a typical load of 80 % results to 11.5 W.

(The power dissipation at full load would be 18.0 W.)

Details UL

Standards

UL 508

for UL feeder circuits >250V

Electrical data UL

rated current (UL): 250 A

rated voltage (UL) AC: 600 V

rated frequency (UL): 50 / 60 Hz

SCCR unprotected max.: 22 kA

3 cycles (without OPD) @ 600 V AC

SCCR protected max.: 200 kA

SCCR: 35 kA with 3VA52 250 A, 3VA61 150 A, 3VA62 250 A / 600 V AC

200 kA with 3VA52 250 A, 3VA61 150 A, 3VA62 250 A / 240 V AC

100 kA with 3VA52 250 A, 3VA61 150 A, 3VA62 250 A / 480 V AC

Mechanical data

W x H x D: 105 x 240 x 35

weight: 102.0 kg/100

poles: 3-pole

for busbars: 12, 15, 20, 25, 30 x 5, 10 and section busbars