
R 30Q NEMA 17
Riduttore - Gear*box*



RAPPORTI	Lunghezza "L" mm	Rendimento %	Coppia per uso continuo Nm	Coppia per uso intermittente Nm	Coppia di picco Nm
RATIO	***Length "L" mm***	***Efficiency %***	**Continuous load torque Nm**	**Non continuos load torque Nm**	***Startig torque Nm***
4	55	91	1	2	4
16	63	82	1	2	4
64	71	73	2	4	10
256	79	65	3	6	15
1024	87	57	3	6	15

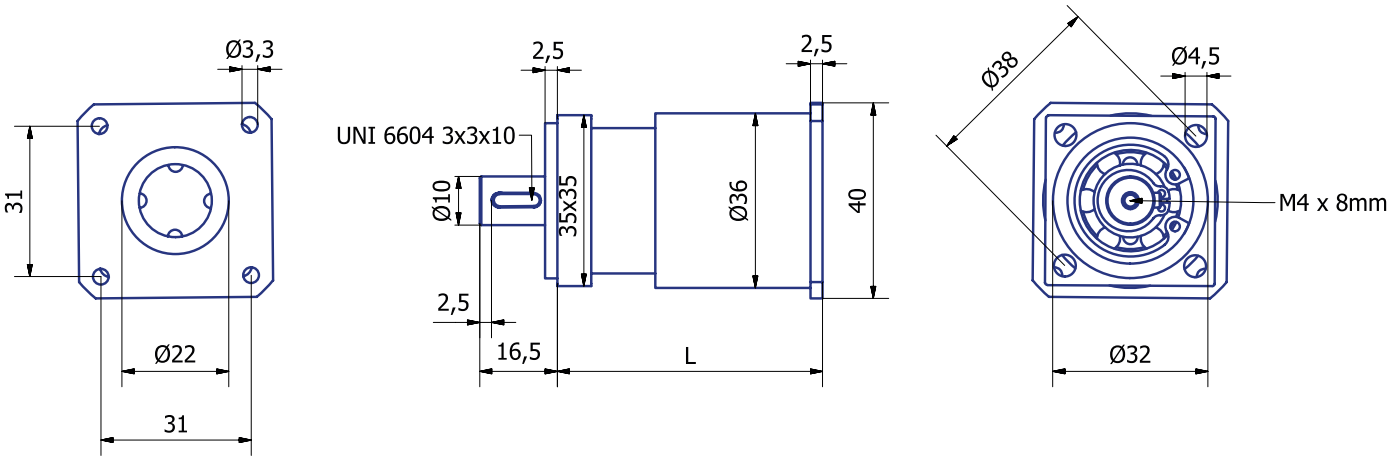

- Riduttore epicicloidale con carcassa in acciaio zincato, flangia in alluminio anodizzato, ingranaggi in delrin e acciaio temperato, albero di uscita supportato da due cuscinetti; velocità massima in ingresso del riduttore 5000 giri, consigliata 3000.
- Lubrificazione permanente.
- È adatto ad essere accoppiato a motori flangiati Nema 17 con albero Ø 5 x 20.
- Con pignone motore da applicare.
- Forze massime che possono agire sull'albero di uscita: Assiale 200 N, Radiale 300 N sul punto estremo dell'albero di uscita.

- *Planetary gearbox with a galvanized steel frame, anodized aluminium flange, delrin and hardned steel gears; output shaft supported by two ball bearings, max input speed at the reduction gear 5000 R.P.M., advised speed 3000 R.P.M.*
- *Permanent greasing.*
- *Suitable to be connected with Nema 17 motor with shaft Ø 5 x 20.*
- *Motor's pinion is to be applied.*
- *Max load on the extremity of output shaft: Axial 200 N, Radial 300 N.*