
R 45 NEMA 23
Riduttore - Gear*box*



RAPPORTI	Rendimento %	Coppia per uso continuo Nm	Coppia per uso intermittente Nm	Coppia di picco Nm
RATIO	*Efficiency %*	*Continuous load torque Nm*	*Non continuos load torque N*	*Startig torque Nm*
4 - 6	91	2,5	5	8
16	81	7,5	15	30
24 - 36	81	7,5	15	25
64 – 96	71	15	25	50
144 – 216	71	10	18	35
384	60	18	30	50

RAPPORTI	Lunghezza “L” mm
RATIO	*Length "L" mm*
4	50
16 - 24	64
64 - 144	80
6	65
36	79
96 - 216	95
384	109

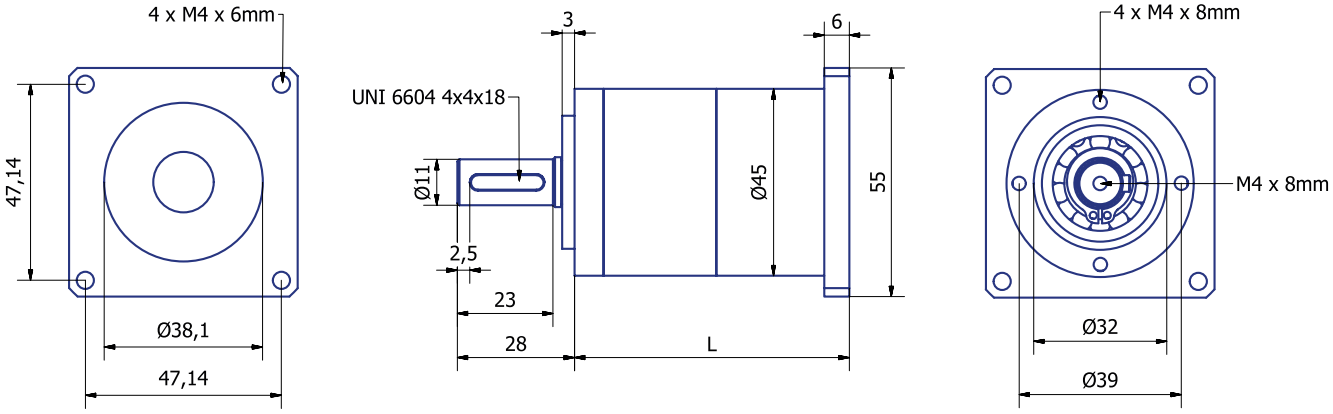

- Riduttore epicicloidale con carcassa in acciaio zincato, flange in alluminio anodizzato, ingranaggi in delrin, acciaio sinterizzato e acciaio temperato, albero di uscita supportato da due cuscinetti; velocità massima in ingresso del riduttore 5000 giri, consigliata 3000.
- Lubrificazione permanente.
- È adatto ad essere accoppiato a motori flangiati Nema 23 con albero Ø 6 o 6,35 x 21.
- Con pignone motore da applicare.
- Forze massime che possono agire sull’albero di uscita: Assiale 200 N, Radiale 300 N sul punto estremo dell’albero di uscita.

- *Planetary gearbox with galvanized steel frame, anodized aluminium flang, delrin, sintered steel and hardned steel gear; output shaft supported by two ball bearings, max input speed at the reduction gear 5000 R.P.M., advised speed 3000 R.P.M.*
- *Permanent greasing.*
- *Suitable to be connected with Nema 23 motor with shaft Ø 6 or 6,35 x 21.*
- *Motor’s pinion is to be applied.*
- *Max load on the extremity of output shaft: Axial 200 N, Radial 300 N.*