
R 52 NEMA 23-R 52 E NEMA 23

Riduttore - Gear*box*

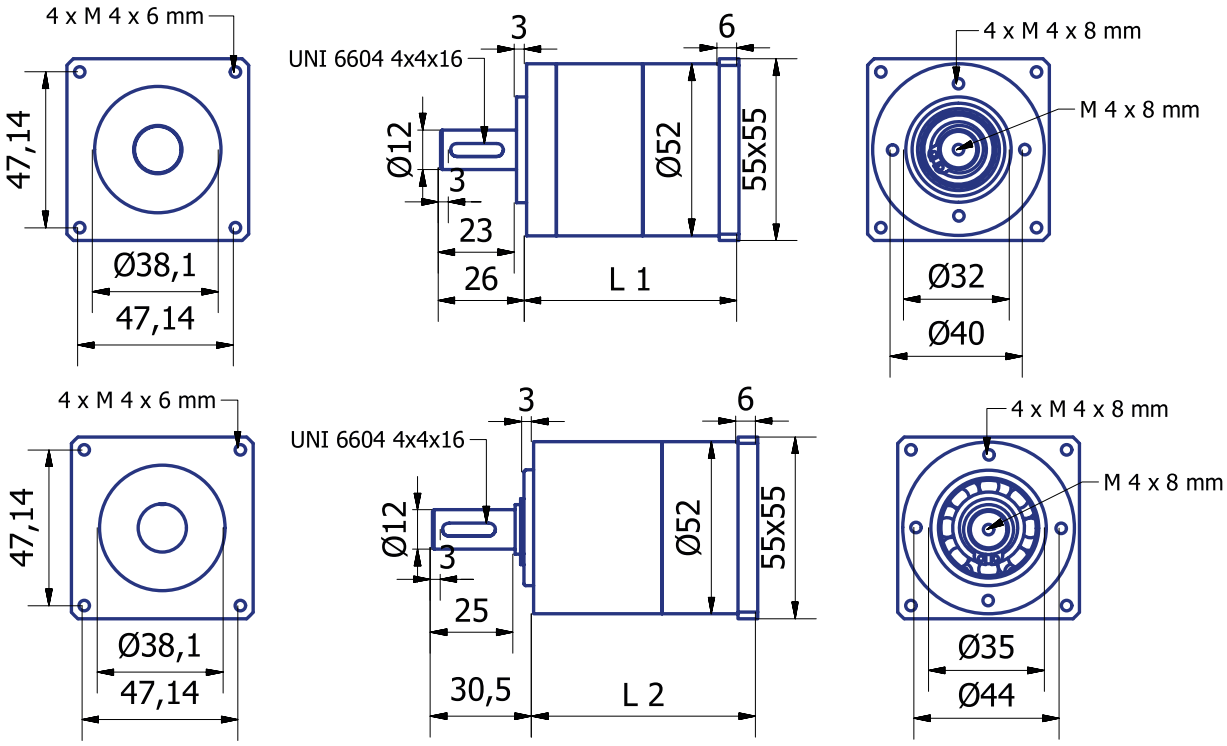

RAPPORTI	Rendimento %	Coppia per uso continuo Nm	Coppia per uso intermittente Nm	Coppia di picco Nm
RATIO	*Efficiency %*	*Continuous load torque Nm*	*Non continuos load torque Nm*	*Startig torque Nm*
4 - 6	91	2,5	5	8
16 - 24 - 36	81	7,5	15	30
64 - 96	71	15	25	65
144 - 216	71	12	20	45
384 - 576 - 864	61	18	30	65

RAPPORTI	Lunghezza "L" mm	Lunghezza "L2" mm
RATIO	*Length "L" mm*	*Length "L2" mm*
4	50	53
6	65	68
16 - 24	65	68
36	80	83
64 - 144	81	84
96 - 216	96	99
386 - 576 - 864	112	115

- Riduttore epicicloidale con carcassa in acciaio zincato, flange in alluminio anodizzato, ingranaggi in delrin, acciaio sinterizzato e acciaio temperato, albero di uscita supportato da due cuscinetti.
- Velocità massima in ingresso del riduttore 5000 giri, consigliata 3000.
- Lubrificazione permanente
- Sono adatti ad essere accoppiati a motori flangiati Nema 23 con alberi Ø 6, 6.35, 8 x 21.
- Con pignone motore da applicare.
- Forze massime che possono agire sull'albero di uscita: Assiale 200 N (300 Versione E), Radiale 300 N (400 Versione E) sul punto estremo dell'albero di uscita.



- *Planetary reduction gearbox with a galvanized steel frame, anodized aluminium flange, delrin, sintered steel and hardned steel gears; output shaft supported by two ball bearings, max input speed at the reduction gear 5000 R.P.M., advised speed 3000 R.P.M.*
- *Permanent greasing.*
- *Suitable to be connected with Nema 23 motor with shaft Ø 6 or 6,35 or 8 x 21.*
- *Motor's pionion is to be applied.*
- *Max load on the extremity of output shaft: Axial 200 N (300 N for 52 E version), Radial 300 N (400 N for 52 E version).*