


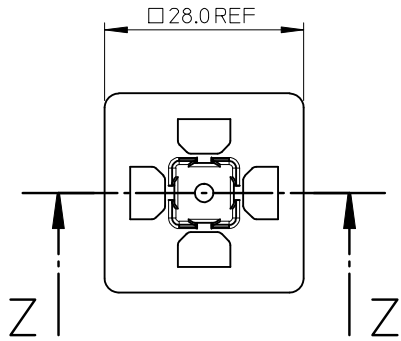




NBR GASKET - BLACK

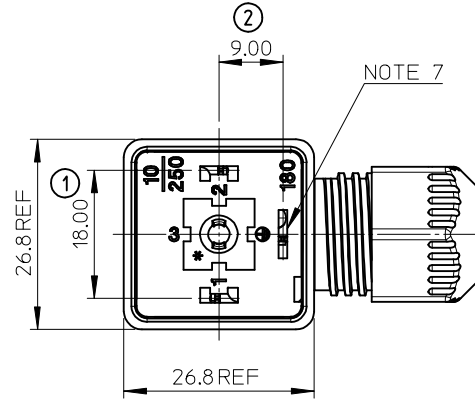


EM-121212-021

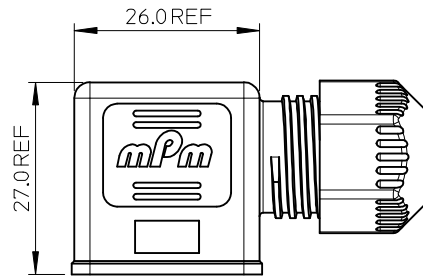

R2 CIRCUIT DIAGRAM

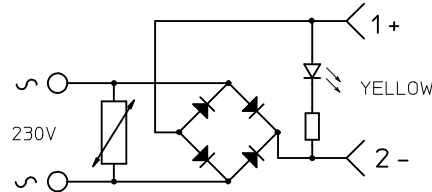

NOTE 5

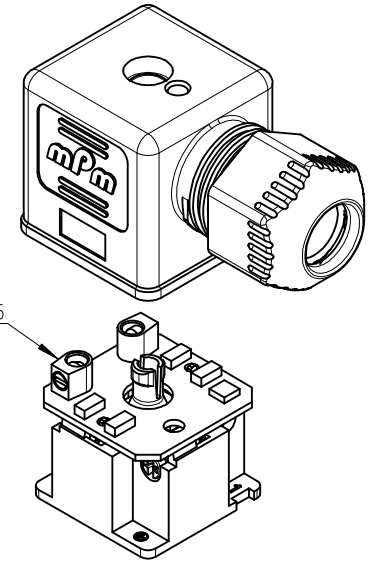

NOTES:

1. PRODUCT SPEC: PS-121201-001
2. PACKAGING SPEC: PK-121207-S28
3. MATERIAL:
COVER HOUSING: PA TRANSP
NUT: PA BLACK
INSERT: PA BLACK
4. ENGINEERING NO: S28200TR2M6RSN
5. PCB DIAGRAM REPRESENTATIVE ONLY
6. PART IS BULK PACK MOUNTED - 50 PCS PER BOX
7. EARTH POSITION: H6
8. CABLE DIAMETER: 4-9mm
9. NOMINAL VOLTAGE: 230V±30V AC
10. MAXIMUM CURRENT: 1.5A
11. CROSS SECTIONAL AREA OF WIRE CONDUCTOR: 1.5mm² MAX, 0.75mm² MIN
12. PROTECTION CLASS: IP67
13. OPERATING TEMPERATURE RANGE: -40°C TO +90°C
14. GLAND NUT TIGHTENING TORQUE: REFER TO PRODUCT SPECIFICATION
15. FIXING SCREW TIGHTENING TORQUE: 0.4Nm

LAST INSPECTION NUMBER USED: 2

DOC TYPE CHANGE EC NO: IPG2016-0173 DRWN:BCAFFREY 2015/07/31 CHKD:DMAHER 2015/08/15 APPR:STGRIFFIN 2015/08/21		DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
			▽=0 ⌒=0		mm	INCH	DRAWN BY DSHEA	DATE 2014/01/20	TITLE S282 TRANSP R2 CIRCUIT, 230V, YELLOW LED				
				4 PLACES	± ---	± ---	CHECKED BY SMCGREEVY	DATE 2014/04/11					
				3 PLACES	± ---	± ---	APPROVED BY STGRIFFIN	DATE 2015/08/21					
				2 PLACES	± 0.10	± ---	molex						
				1 PLACE	± 0.20	± ---							
				0 PLACE	± ---	± ---							
			ANGULAR ± 2 °		MATERIAL NO. 1212120021		DOCUMENT NO. SD-121212-021		SHEET NO. 1 OF 1				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								