

S5-M

Socket for square base relay C5-...

Type:	S5-M 3-pole, 3 level Module slot for timer- and monitoring modules, over voltage suppressing- and LED indicator modules coil bridge bus bar to connect in A2
-------	--

Rated current	16 A
---------------	-------------


Specifications	
Rated load	16 A / 400 V
Insulation	Test voltage V_{rms} / 1 min
– All terminal/DIN rail	4 kV
– Terminal/terminal	4 kV
Cross section of connecting wire	
– Single wire	1 x 6 mm ² , 2 x 2,5 mm ²
– Multi wire	1 x 6 mm ² /AWG10, 2 x 1,5 mm ² /AWG16
Max. screw torque	1 Nm
Screw dimensions	M3,5, Pozi, slot
Integrated retaining clip/plastic	for relay series C5
Labelling space	detachable
Connection label	1 ... 12, DIN/EN
Mounting	DIN rail TS35 or panel mounting 1 x M4
Ambient temperature operation / storage	-40 (no ice) ... 60° C/-40 ... 80° C
Weight	92g

Associated, plug-in 11-pin MRC relays	C5-A, C5-G, C5-X, C5-M, C5-R
---------------------------------------	-------------------------------------


Accessories	
Coil bridge bus bar	C-A2
Retaining clip, plastic	S5MCP



Connection diagram

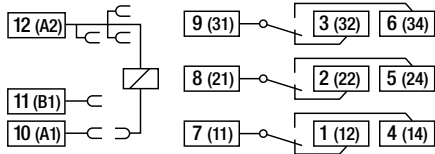

Dimensions [mm]

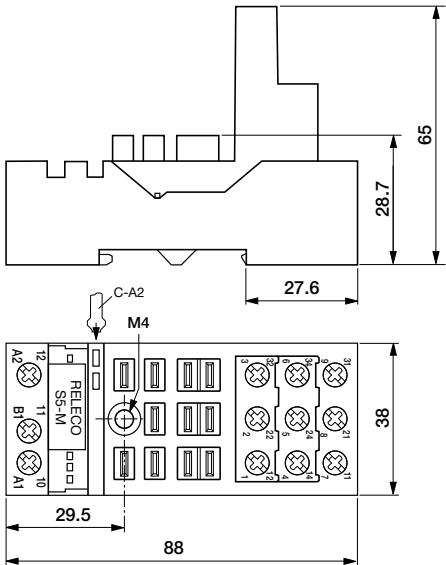

Technical approvals, conformities

