


connection module (01563)



The picture may show a similar product.

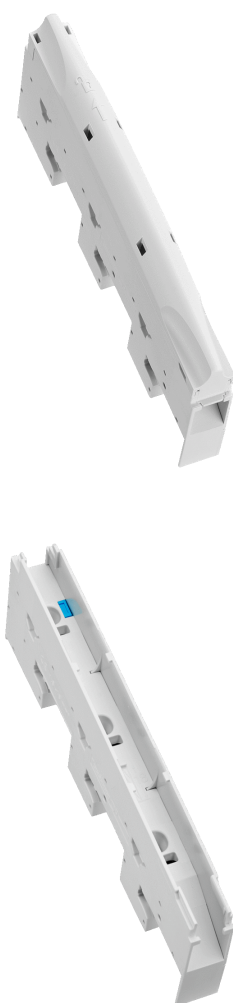

Description

Part No.: **01563**000A

CRITO[®] 60Classic

connection module

with integrated spring terminals 1.5 - 16 mm², AWG 14 - 6

3-pole

for busbars 12, 15, 20, 25, 30 x 5, 10 and section busbars

System

60Classic

Product group 07

Subgroup 40

pack size 8
EAN 4021267015633

catalog page 2020 : 3.5

ECLASS 6.1 27141146
ECLASS 7.1 27141146
ETIM 4.0 EC000001
ETIM 5.0 EC000001

Approvals

Standards

IEC 61439-1:2011
IEC 60999-1:1999
IEC 60999-2:2003
UL 508

Approvals

UL , EAC



for UL feeder circuits >250V

type number: M16-L
EAC Type: TE-M

UL file: E123577, UL category (for USA): NMTR <http://www.ul.com>
UL file: E123577, UL category (for Canada): NMTR7 <http://www.ul.com>
CCC approval: no certification required

Technical data

Details IEC

Standards

IEC 61439-1:2011
IEC 60999-1:1999
IEC 60999-2:2003

Electrical data IEC

Rated current (IEC): 63 A
rated voltage (IEC) AC: 690 V

rated isolation voltage U_i AC: 800 V

rated surge voltage U_{imp} : 6 kV

The insulation performance of the article depends on the installation conditions.

rated peak withstand current I_{pk} max.: 13.0 kA

power dissipation of the article:

The power dissipation at a typical load of 80 % results to 0.0 W.

(The power dissipation at full load would be 0.0 W.)

Supplementary data IEC

The following values have been verified with tests under certain conditions. Please ask Wöhner for this conditions before designing your panel.

max. permitted voltage (IEC) AC: 800 V

max. permitted voltage (IEC) DC: 800 V

current capacity (IEC) max.: 80 A

Details UL

Standards

UL 508

for UL feeder circuits >250V

suitable for field-installed conductors

Electrical data UL

rated current (UL): 48 A

rated voltage (UL) AC: 600 V

rated frequency (UL): 50 / 60 Hz

SCCR unprotected max.: 5 kA

3 cycles (without OPD) @ 600 V AC

SCCR protected max.: 50 kA

SCCR: 50 kA with JDDZ fuse Class J 60 A / 600 V AC
35 kA with any DIVQ/7 circuit breaker 60 A / 480 V AC

Mechanical data

W x H x D: 20 x 200 x 91
weight: 18.1 kg/100
poles: 3-pole
for busbars: 12, 15, 20, 25, 30 x 5, 10 and section busbars

Terminal points

min. cross-section: 1.5 mm²
max. cross-section: 16 mm²
Not suitable for aluminium cables !

for leads as per IEC :
Cu 1.5 - 16mm²
round conductor solid or stranded, flexible, direct or with wire-end ferrule

for leads as per UL :
Cu AWG 14 - 6
Class B (UL486E)