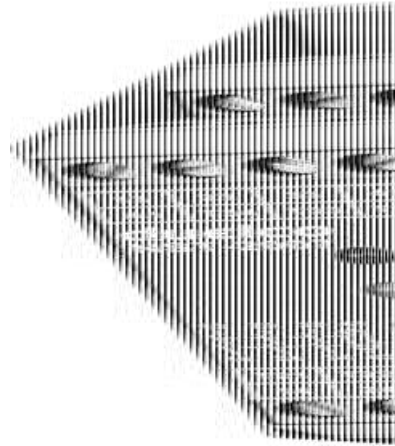


**DUELCO NST-2008F SAFETY RELAY**

42080010

Relay/NST2008F/24VDC/E-STOP

- Supply voltage 24 V DC
- 3 NO safety output+ 1 NC signal output
- Also suitable for use with non-contacting safety limit switches

**PRODUCT DESCRIPTION**

The Duelcon NST-2008F is intended for monitoring HS buttons and safety limits.

Thanks to the current limitation of the emergency stop circuit (max. 100mA), the NST-2008F is well suited for monitoring safety magnetic switches.

**TECHNICAL DATA**

<b>IP class connection</b>	IP20
<b>IP class housing</b>	IP40
<b>PL</b>	e
<b>Power consumption</b>	1.5 W
<b>Safety category</b>	4
<b>Safety outputs NO</b>	3 NO
<b>Signal output NC</b>	1 NC
<b>Supply voltage</b>	24 V DC
<b>Temperature operational max</b>	50 °C
<b>Temperature operational min</b>	-20 °C
<b>Tolerance</b>	± 10 %

