OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

P20Z AC SIGNAL TRANSDUCER

AC Current or AC Voltage

P20Z0111100
P20Z Transducer, 0-60V, 0-5 mA, 85-253V ac, Insep Screws



- AC current or voltage input
- 0>10V or 4>20mA output
- Wide voltage, AC/DC control

PRODUCT DESCRIPTION

Please refer to the data sheet for ordering keys and contact us for more information.
;

TECHNICAL DATA

Accuracy	0.2 accuracy class
Additional functions	Free eCon software (using PD14 programmer)
Dimensions	22.5 x 120 x 100 mm
Display	No
Input type	0-60V
IP class	IP50
Mounting	TS 35, DIN rail
Outputs	0-5 mA
Power consumption	4 VA
Supply voltage	85-253 V ac, 90-300 V dc
Weight	0.125 kg

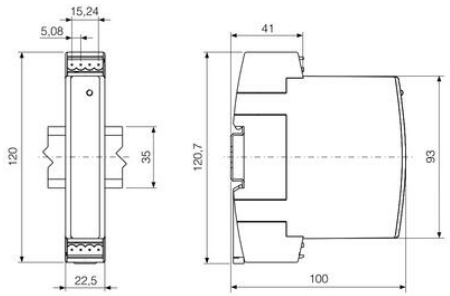
15,24
5,08
120
35
22,5
41
120,7
93
100

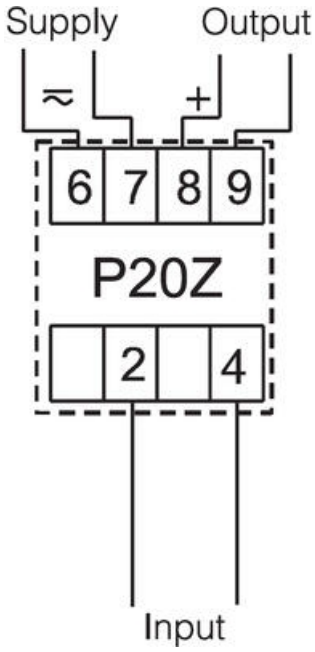
Supply
Output
≈
+
6 7 8 9
P20Z
2 4
Input

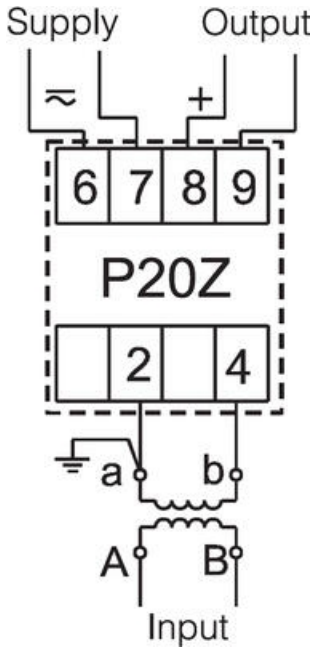
Supply
Output
≈
+
6 7 8 9
P20Z
2 4
a
b
A
B
Input

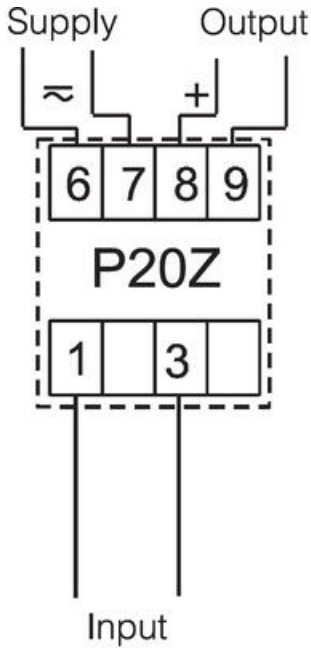
Supply
Output
≈
+
6 7 8 9
P20Z
1 3
Input

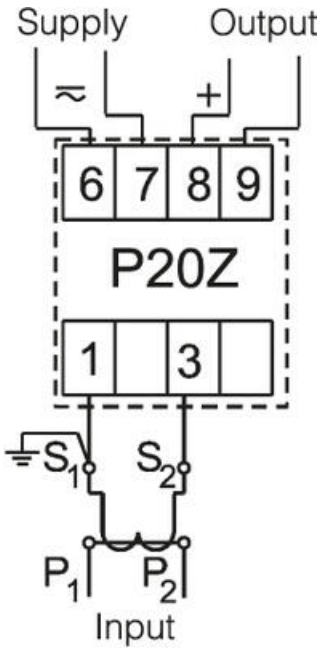
Supply
Output
≈
+
6 7 8 9
P20Z
1 3
S1
S2
P1
P2
Input

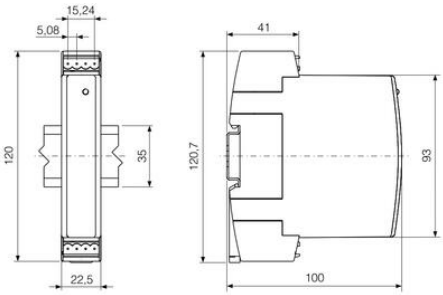
15,24
5,08
120
35
22,5
41
120,7
93
100

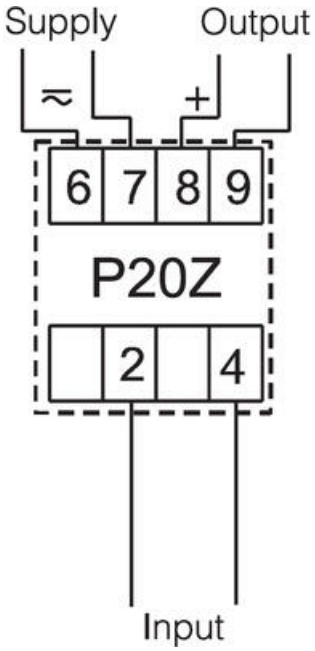
Supply
Output
≈
+
6 7 8 9
P20Z
2 4
Input

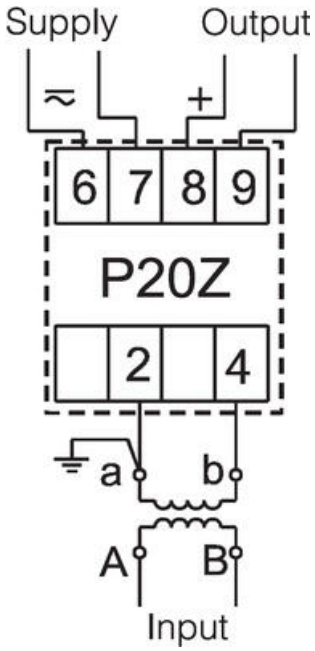
Supply
Output
≈
+
6 7 8 9
P20Z
2 4
a
b
A
B
Input

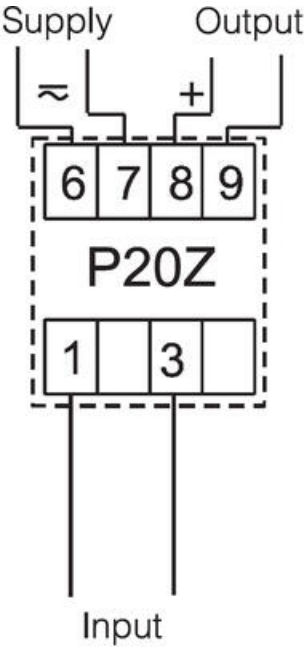
Supply
Output
≈
+
6 7 8 9
P20Z
1 3
Input

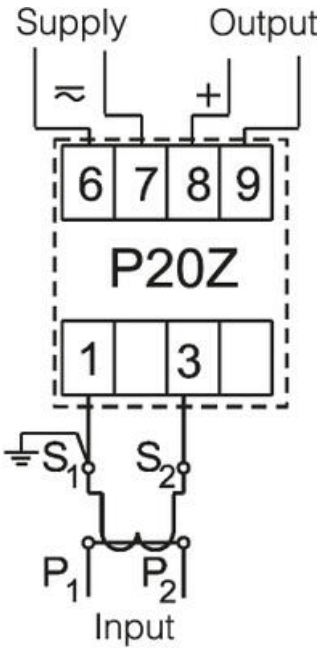
Supply
Output
≈
+
6 7 8 9
P20Z
1 3
S1
S2
P1
P2
Input