OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

VARIOLINE LAMP WITH SOCKET LED 121/122 - OBSOLETE - NEW RANGE COMING SOON

Varioline

12200.0-30
OBSOLETE - LED 122 220-240 V AC, on/off switch, magnet fixing,Germany/Russia socket



- OBSOLETE
- FOR LED LIGHT USE LED 025
- FOR SOCKETS USE SD 035

PRODUCT DESCRIPTION

LED 121/122 Range is now Obsolete - Stego has a New Range coming Mid 2024

TECHNICAL DATA

GENERAL DATA

Mounting	Magnetic mount
Nominal voltage	220-240 V AC
Activation	Switch
Connection type	3-pole plug with snap lock
Socket	DE/DK/FI/NO/RU/SE
Nominal socket current	16 A
Light source	LED
Luminance	1.080 Lm/1.730 Lm
Life span	60,000h at +20°C

DIMENSIONS

Length	700 mm
Width	100 mm
Height	44 mm

ELECTRICAL SPECIFICATION

Frequency	50/60 Hz

Power consumption	16 W


SAFETY & APPROVALS

Protection class	I (earthed)
IP class	IP20
Approvals	CE, RoHS
Approvals pending	VDE

MATERIALS - CONDITIONS

Material of body	Plastic
Colour	Translucent/White
Operational temperature	-30°C … +40°C
Storage temperature	-40°C … +85°C
Operating humidity	< 90% RH
Humidity storage	<90% RH

Voltage min	200 V ac
Voltage max	265 V ac
Weight	0.4 kg

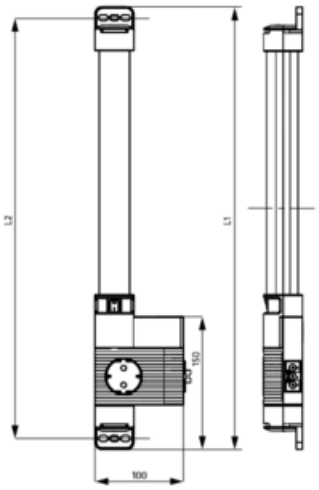

LED 121 (Size 1)
L1 = 500 mm
L2 = 475 mm

LED 122 (Size 2)
L1 = 700 mm
L2 = 675 mm

