

VARIOLINE LAMP WITH SOCKET LED 121/122 - OBSOLETE - NEW RANGE COMING SOON

Varioline

12204.0-30

OBSOLETE - LED 122 120 V AC, on/off switch, magnet
fixing, USA/Canada socket

- OBSOLETE
- FOR LED LIGHT USE LED 025
- FOR SOCKETS USE SD 035



PRODUCT DESCRIPTION

LED 121/122 Range is now Obsolete - Stego has a New Range coming Mid 2024

TECHNICAL DATA

GENERAL DATA

Mounting	Magnetic mount
Nominal voltage	120 V AC
Activation	Switch
Connection type	3-pole plug with snap lock
Socket	USA/CA
Nominal socket current	15 A
Light source	LED
Luminance	1.080 Lm/1.730 Lm
Life span	60,000h at +20°C

DIMENSIONS

Length	700 mm
Width	100 mm
Height	44 mm

ELECTRICAL SPECIFICATION


Frequency	50/60 Hz
Power consumption	16 W

SAFETY & APPROVALS

Protection class	I (earthed)
IP class	IP20
Approvals	CE, RoHS
Approvals pending	UL


MATERIALS - CONDITIONS

Material of body	Plastic
Colour	Translucent/White
Operational temperature	-30°C ... +40°C
Storage temperature	-40°C ... +85°C
Operating humidity	< 90% RH
Humidity storage	<90% RH
Voltage min	110 V ac
Voltage max	130 V ac
Weight	0.4 kg

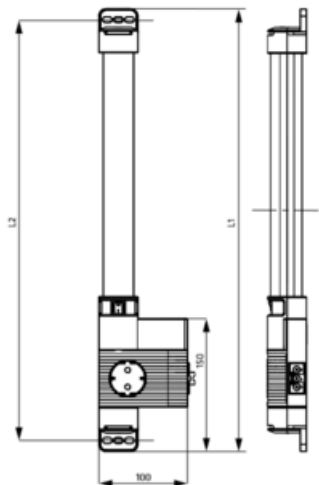

LED 121 (Size 1)
L1 = 500 mm
L2 = 475 mm

LED 122 (Size 2)
L1 = 700 mm
L2 = 675 mm

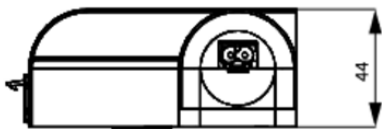

View of magnet fixing

