OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

VARIOLINE LAMP WITH SOCKET LED 121/122 - OBSOLETE - NEW RANGE COMING SOON

Varioline

12132.0-00
OBSOLETE - LED 121 220-240V AC, without switch, screw fixing, Switzerland socket



- OBSOLETE
- FOR LED LIGHT USE LED 025
- FOR SOCKETS USE SD 035

PRODUCT DESCRIPTION

LED 121/122 Range is now Obsolete - Stego has a New Range coming Mid 2024

TECHNICAL DATA

GENERAL DATA

Mounting	Screw fixing
Nominal voltage	220-240 V AC
Activation	No switch
Connection type	3-pole plug with snap lock
Socket	CH
Nominal socket current	10 A
Light source	LED
Luminance	1.080 Lm/1.730 Lm
Life span	60,000h at +20°C

DIMENSIONS

Length	500 mm
Width	100 mm
Height	44 mm

ELECTRICAL SPECIFICATION

Frequency	50/60 Hz

Power consumption	11 W


SAFETY & APPROVALS

Protection class	I (earthed)
IP class	IP20
Approvals	CE, RoHS

MATERIALS - CONDITIONS

Material of body	Plastic
Colour	Translucent/White
Operational temperature	-30°C … +40°C
Storage temperature	-40°C … +85°C
Operating humidity	< 90% RH
Humidity storage	<90% RH

Voltage min	200 V ac
Voltage max	265 V ac
Weight	0.4 kg

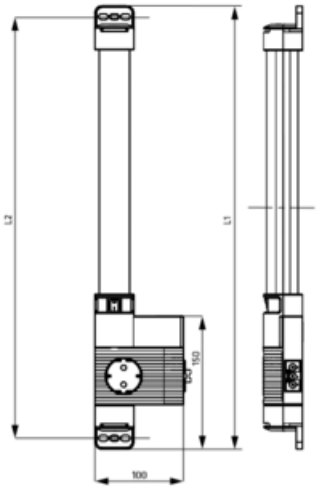

LED 121 (Size 1)
L1 = 500 mm
L2 = 475 mm

LED 122 (Size 2)
L1 = 700 mm
L2 = 675 mm

