



VARIOLINE LAMP WITH SOCKET LED 121/122 - OBSOLETE - NEW RANGE COMING SOON



Varioline

12111.0-00

OBSOLETE - LED 121 220-240V AC, PIR sensor,
screw fixing,FR/PL/CZ/SK socket

- OBSOLETE
- FOR LED LIGHT USE LED 025
- FOR SOCKETS USE SD 035



PRODUCT DESCRIPTION

LED 121/122 Range is now Obsolete - Stego has a New Range coming Mid 2024

TECHNICAL DATA

GENERAL DATA

Mounting	Screw fixing
Nominal voltage	220-240 V AC
Activation	IR sensor
Connection type	3-pole plug with snap lock
Socket	FR/PL/CZ/SK
Nominal socket current	16 A
Light source	LED
Luminance	1.080 Lm/1.730 Lm
Life span	60,000h at +20°C

DIMENSIONS

Length	500 mm
Width	100 mm
Height	44 mm

ELECTRICAL SPECIFICATION

Frequency	50/60 Hz
Power consumption	11 W

SAFETY & APPROVALS


Protection class	I (earthed)
IP class	IP20
Approvals	CE, RoHS
Approvals pending	VDE

MATERIALS - CONDITIONS

Material of body	Plastic
Colour	Translucent/White
Operational temperature	-30°C ... +40°C
Storage temperature	-40°C ... +85°C
Operating humidity	< 90% RH
Humidity storage	<90% RH

ADDITIONAL DATA

Weight	0,4 kg
Voltage max	265 V ac
Voltage min	200 V ac

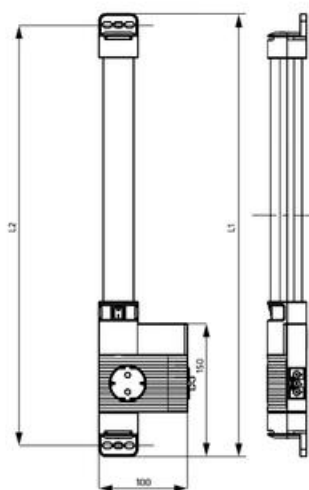

LED 121 (Size 1)
L1 = 500 mm
L2 = 475 mm

LED 122 (Size 2)
L1 = 700 mm
L2 = 675 mm



View of screw fixing

