




ASCO - 356 SERIES DIRECT OPERATED

3/2 Valve Block

SCG356A819V

2 valve manifold, N/C, 3/2, 1/8", 230VAC

- Normally closed/open or universal
- Save space and installation time
- Working pressure 0 bar to 10 bar
- Block in brass or stainless

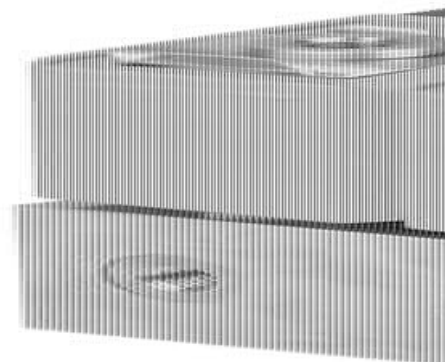

PRODUCT DESCRIPTION

TECHNICAL DATA

Approvals	CSA, UL
Close delay	5 ms
Connection port 1-2	G1/8
Connection port 3	M5
Differential air pressure max	10 bar
Differential oil pressure max	10 bar
Differential pressure min	0 bar
Differential water pressure max	10 bar
Flow factor / flow coefficient	0,08
Flow max	1,33 l/min
Function	3/2, Normally Closed (SPST)
IP class	IP65
Material body	Brass
Material of seals	FPM
Material plunger	Stainless steel
Material plunger tube	Stainless steel

Material seat	Brass
Material seat seal	FPM
Material short-circuit ring	Copper
Material spring	Stainless steel
Number of valves	2
Power consumption	4 W
Response time off	10 ms
Temperature of media from	-10 °C
Temperature of media to	100 °C
Temperature operational max	60 °C
Temperature operational min	-10 °C
Throughput	1,6 mm
Weight	0,321 kg
Viscosity max	40 cSt
Voltage ac max	230 V

