


EMC HIGH TEMPERATURE - CONTACT SLEEVE

Progress® MS EMC HT

1080.10.91.040
Gland EMC NPB, sleeve, High temp, M10, ø3...4mm

- Permenant contact pressure
- 360° contact sleeve construction
- -40°C...+200°C
- IP68 up to 10 bar, IP69K

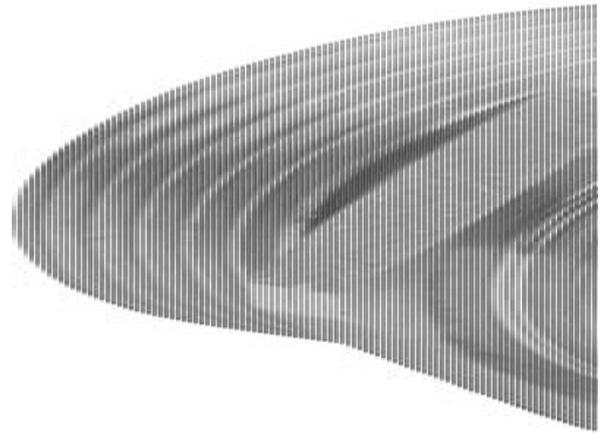

PRODUCT DESCRIPTION

TECHNICAL DATA**GENERAL DATA**

Thread Size (G)	M10
Insert Type	One-Piece
Cable diameter min	3 mm
Cable diameter max	4 mm
IP class	IP 68 (up to 10 bar), IP 69 further protection

DIMENSIONS

Thread pitch	1.5
Thread length	5 mm
Height (H)	16 mm
Spanner width (AF)	13 mm

MATERIALS

Material	Nickel-plated brass
Materials O-ring	FPM
Material of seals	FPM
Contact sleeve material	Nickel-plated brass

Temperature range	-40°C ... +200°C
-------------------	------------------

APPROVALS

Approvals	EAC
Strain relief	Version A acc. to EN 62444

ADDITIONAL DATA

Pack size	50
Country of origin	CH
Tariff code	74199949
Weight	10.86 g
Additional features	Metric coarse-pitch thread

