


## EMC - CONTACT SLEEVE

Progress® MS EMC

1080.10.040

Gland EMC NPB, sleeve, M10, ø3...4mm

- Permanent contact pressure
- 360° contact sleeve construction
- -40°C...+100°C
- IP68 up to 10 bar, IP69K

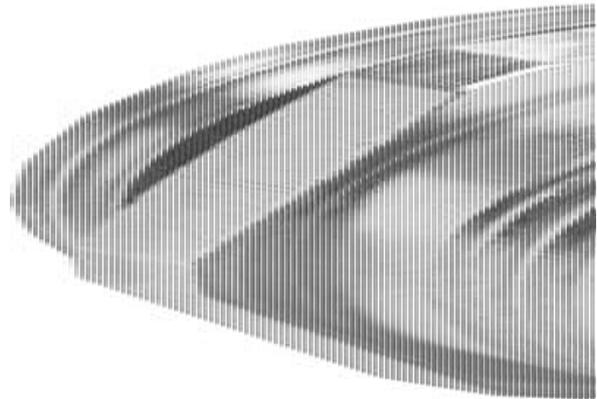

### PRODUCT DESCRIPTION

## TECHNICAL DATA

### GENERAL DATA

Thread Size (G)	M10
Insert Type	One-Piece
Cable diameter min	3 mm
Cable diameter max	4 mm
IP class	IP 68 (up to 10 bar), IP 69 further protection

### DIMENSIONS

Thread pitch	1.5
Thread length	5 mm
Height (H)	16 mm
Spanner width (AF)	13 mm

### MATERIALS

Material	Nickel-plated brass
Materials O-ring	NBR
Material of seals	TPE
Contact sleeve material	Nickel-plated brass

Temperature range	-40°C ... +100°C
-------------------	------------------

## APPROVALS

Approvals	SEV, CE, cRUus, DNV, EAC, VDE
Strain relief	Version A acc. to EN 62444

## ADDITIONAL DATA

Pack size	50
Country of origin	CH
Tariff code	74199949
Weight	10.3 g
Additional features	Metric coarse-pitch thread (with VDE test report)

