OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

SYNTEC POLYAMIDE PA 6

Syntec®

1555.20.1.08
Gland Syntec synthetic, M20, long, ø3.5…8mm



- Trapezoidal strain relief
- Lamellar technology
- -30°C…+100°C
- Halogen free
- IP68

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Thread Size (G)	M20
Insert Type	One-Piece
Cable diameter min	3.5 mm
Cable diameter max	8 mm
IP class	IP 68
Colour	Grey RAL 7035

DIMENSIONS

Thread pitch	1.5
Thread length	15 mm
Height (H)	29 mm
Spanner width (AF)	24 mm

MATERIALS


Material	Polyamide
sealing ring material	TPE
Temperature range	-30°C ... +100°C

APPROVALS

Approvals	CE, cRUus, cULus, DNV, EAC, VDE
Strain relief	Version A acc. to EN 62444


ADDITIONAL DATA


Pack size	50
Country of origin	DE
Tariff code	39269000
Weight	12.58 g

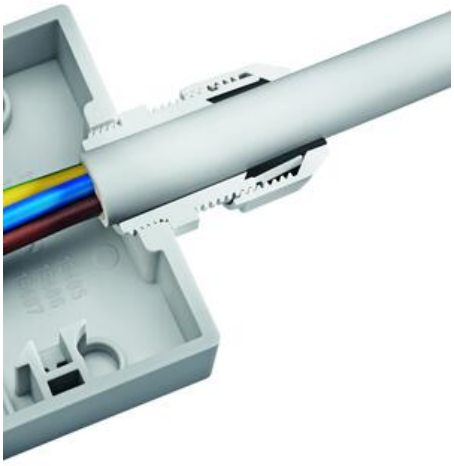






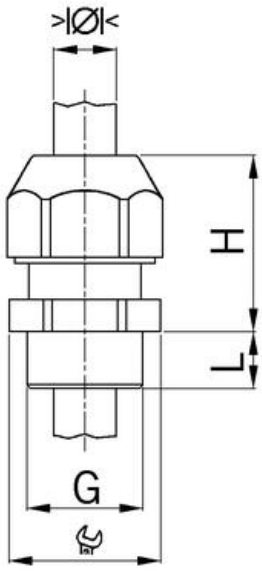

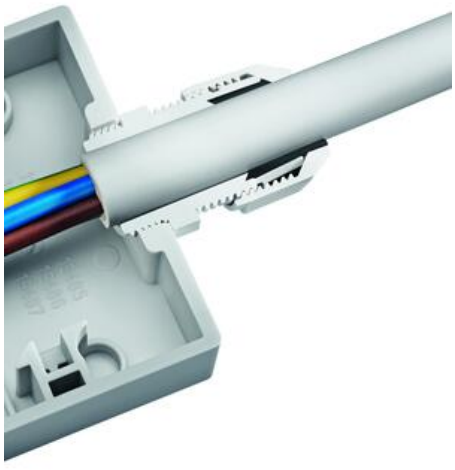



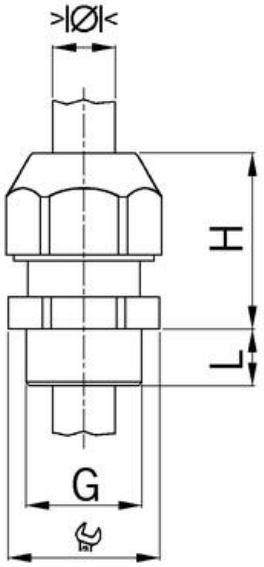


>IØI<
H
L
G