

## EARTH TERMINALS - SCREW ON - SL


### 2.5-35 MM<sup>2</sup>, SSL 50-70MM<sup>2</sup>

SL, SSL

1535.2

SL 16/35/IS, Screw clamp 16mm earth terminal, Allen Key screw

- Screw to rail construction
- SL - Material polyamide 6.6 - UL94-V2
- Temperature resistance -40 °C...+105 °C
- SSL - Material polyamide 6.6 - UL94-V0
- Temperature resistance -40 °C...+120 °C

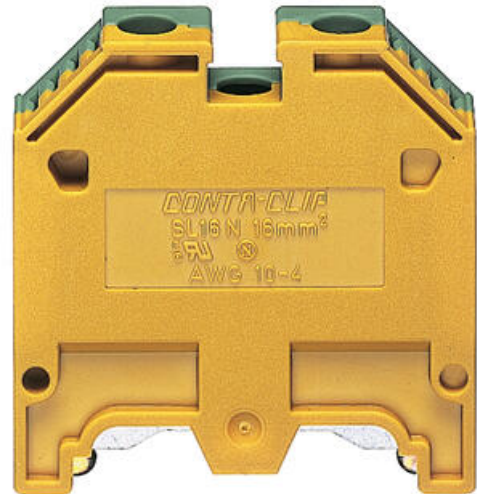

## PRODUCT DESCRIPTION

The RK and SL range is the original traditional terminal range feed-through featuring the proven screw-connection system and screw in cross connectors.

This range is available with the 'multi-foot' construction, so will fit on TS35 and TS15 – 'Top Hat' rail or the less common TS32 – 'G-Rail', still used in some applications today.

The range also includes disconnect terminals, fused terminals, actuator, sensor, motor-connection terminals and a range of direct mount options.

For applications where space is at a premium the TS15 range is small and compact, but can still accommodate 4mm<sup>2</sup> cable sizes.

## TECHNICAL DATA

### GENERAL DATA

Rated wire cross section	35 mm <sup>2</sup>
Colour	Green/yellow
Mounting	TS 35
Overvoltage category	III
Contamination degree	3
Approvals	UL, CSA, CSA US, cUL, KEMA KUR, NEMKO, EAC
Additional information	with allen screws

### DIMENSIONS

Length	50 mm
Width	12 mm

Height TS 35/7.5	58.5 mm
------------------	---------

## CONNECTION DATA

Connections	2
Number of levels	1
Plug gauge acc. EN 60 947-1	B7
Cross connect channels	1
Cross section single wire from	2.5 mm <sup>2</sup>
Cross section single wire to	25 mm <sup>2</sup>
Cross section stranded wire from	2.5 mm <sup>2</sup>
Cross section stranded wire to	16 mm <sup>2</sup>
Cross section stranded with ferrule from	2.5 mm <sup>2</sup>
Cross section stranded with ferrule to	16 mm <sup>2</sup>
Rated wire cross section from (AWG)	10
Rated wire cross section to (AWG)	4
Stripping length	15 mm
Screw size	M 5
Screw type	Hexagon/Allen key
Torque min	2
Torque max	4

## MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V2
Operating temperature from	-40 °C
Operating temperature to	105 °C

## APPROVALS

UL test standard	UL 1059
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
cUL test standard	C22.2 No 158
EAC test standard	TR ZU 004/2013
KEMA KEUR test standard	EN 60947-7-2:2009

## ADDITIONAL DATA

Tariff code	85369010
-------------	----------

Country of origin	DE
Weight	54.8 g
Pack size	50
Type of terminal	Screw Terminals, DIN Rail terminals
Nemko test standard	EN 60947-7-2:2002

