


## FEED THROUGH TERMINALS - SRK 2.5-120MM<sup>2</sup>

SRK

17102.2

SRK 2.5/2A/Z Beige, 2.5mm Feed through terminal, peg

- Pluggable cross connectors up to 35mm<sup>2</sup>
- Available in 9 colours
- 1000V rated
- Material polyamide 6.6 - UL94-V0
- Temperature resistance -40 °C...+120 °C

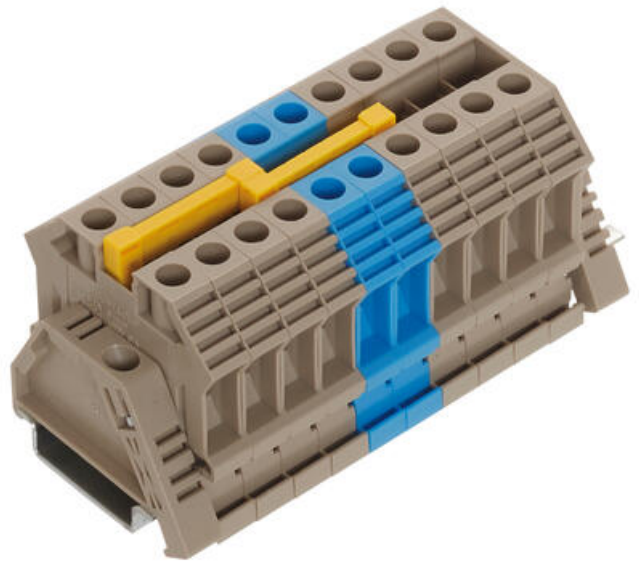

### PRODUCT DESCRIPTION

Packed with innovative features

The SRK range of screw terminals from Conta Clip is packed with innovative features designed to increase connection strength, speed up your assembly times and optimize your stock.

Now available for cable sizes from 2.5mm<sup>2</sup> to 120mm<sup>2</sup>

Cutting edge design & quality materials

Conta Clip has proved it is still possible to improve the design of even the most long established components. They are characterised by their compact housing shape, exceptional stability, good vibration resistance and improved wire grip at the terminal point.

Fast assembly & connection

The easy to operate screw connection makes it easy and safe to connect both solid and flexible wires with or without ferrules. The protective earth terminals have rail connections on both sides of the foot, they simply snap onto the din-rail with no need for screws. The insulated cross connectors are pluggable and simply pushed in to place in one of two channels in the top of each terminal. These features dramatically speed up assembly time but still ensure maximum mechanical and electrical security.

Flexibility to optimize your stock

You can use a cutting tool to shorten the pluggable cross connectors as required. Once cut the exposed edge is simply covered using the innovative push on insulation cap to ensure touch protection is fully maintained. Where once many different variations of cross connectors needed to be stocked you now need

only one length of cross connectors and some end caps helping reduce inventory costs.  
Available in the following colours; Yellow, Blue, Black & Red.

Clear concise marking  
Most applications demand clearly marked terminals. The four way labelling channel in conjunction with a wide range of markers allows a variety of possibilities. Pre-marked labels are available with standard letters & digits or custom labels can be marked here at OEM Automatic to your exact requirements.

- Feed-through & protective earth terminals
- Compact design
- Wide range of sophisticated accessories
- Pluggable insulated cross connectors that can be easily modified to suit (up to 35mm<sup>2</sup>)
- Cross connectors can carry max rated current & voltage of the terminals
- Large wire entry bay positioned at the same level across all terminal types
- Global standards

## TECHNICAL DATA

### GENERAL DATA

Rated wire cross section	2.5 mm <sup>2</sup>
Colour	Beige
Rated voltage IEC	1000 V
Rated current IEC	24 A
Load current max	32 A
Mounting	TS 35
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3
Approvals	UL, CSA, GL, CSA US, cUL, KEMA KUR, EAC
Additional information	with housing pegs

### DIMENSIONS

Length	48 mm
Width	5 mm
Height TS 35/7.5	47 mm

### CONNECTION DATA

Connections	2
Number of levels	1
Plug gauge acc. EN 60 947-1	A3
Cross connect channels	2
Number of test pick off options	1
Cross section single wire from	0.2 mm <sup>2</sup>
Cross section single wire to	4 mm <sup>2</sup>

Cross section stranded wire from	0.2 mm <sup>2</sup>
Cross section stranded wire to	4 mm <sup>2</sup>
Cross section stranded with ferrule from	0.2 mm <sup>2</sup>
Cross section stranded with ferrule to	2.5 mm <sup>2</sup>
Rated wire cross section from (AWG)	30
Rated wire cross section to (AWG)	12
Stripping length	10 mm
Screw size	M 2,5
Screw type	Slotted
Torque min	0.4
Torque max	0.8

## MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

## APPROVALS

Rated voltage UL	600 V
Rated current UL	25 A
UL test standard	UL 1059
Rated voltage CSA	600 V
Rated current CSA	25 A
CSA test standard	C22.2 No 158
Rated voltage CSAus	600 V
Rated current CSAus	25 A
CSAus test standard	UL 1059
Rated voltage cUL	600 V
Rated current cUL	25 A
cUL test standard	C22.2 No 158
GL test standard	IEC 60947-7-1:2009
EAC test standard	TR ZU 004/2011
KEMA KEUR test standard	EN 60947-7-1:2009

## ADDITIONAL DATA

<b>Tariff code</b>	85369010
<b>Country of origin</b>	DE
<b>Weight</b>	7.13 g
<b>Pack size</b>	100
<b>Type of terminal</b>	Screw Terminals, DIN Rail terminals

